



# 高性能蝶阀

High Performance Butterfly Valves



湖南高茨控制系统科技有限公司

Hunan Qualzess Control System Technology Co.ltd

⑧ 湖南省澧县经济开发区创新创业园

✉ info@qualzess.com

🌐 www.qualzess.com

📞 0736-3249699

服务热线 4000-787816

湖南高茨控制系统科技有限公司

Hunan Qualzess Control System Technology Co.ltd

致力于为流体控制产业提供性能可靠、品质卓越的阀门及相关流体控制产品和服务

Devoted to providing valves of reliable performances and excellent quality and related fluid control products and services for the fluid control industry

# Content 目录

02	公司简介 Company Profile	23	8300型对夹式蝶阀 Type 8300 Wafer Butterfly Valve
04	资质证书 Certifications	25	8600型对夹式蝶阀 Type 8600 Wafer Butterfly Valve
05	零缺陷管控 Zero Defect Control	26	5150型多耳式单法兰蝶阀 Type 5150 Multi-ear Single Flange Butterfly Valve
06	成套系统解决方案 Whole-set System Solution	28	5300型多耳式单法兰蝶阀 Type 5300 Multi-ear Single Flange Butterfly Valve
11	蝶阀型号编制说明 Illustration Of Categorizing Of The Butterfly Valve Model	30	5600型多耳式单法兰蝶阀 Type 5600 Multi-ear Single Flange Butterfly Valve
12	概述 Summary	31	8150型双法兰蝶阀 Type 8150 Double Flange Butterfly Valve
13	产品结构特征 Product Structure Features	32	8300型双法兰蝶阀 Type 8300 Double Flange Butterfly Valve
17	额定值 Rated Value	33	8150型对夹式高平台蝶阀 Type 8150 Wafer Type High Platform Butterfly Valve
18	阀门扭矩 Valve Torque	34	焊接端双偏心蝶阀 Welding End Double Eccentric Butterfly Valve
20	流量参数 Flow Parameters	35	法兰技术资料 Flange Technical Data
21	8150型对夹式蝶阀 Type 8150 Wafer Butterfly Valve		



# 公司简介

## Company Profile

湖南高茨控制系统科技有限公司源自于2006年从德国引进双偏心高性能蝶阀、高性能球阀及自控调节阀门等先进技术，经过“奥德森”、“翰达”、“德尔斯威”品牌延伸及雄厚的技术积累，是国内首创的替代进口产品，公司产品性能及质量均达到并超越国际先进水平。2019年度被授予国家高新技术企业。公司自成立以来，一直致力于为全球客户提供完善的阀门及流体控制系统全套解决方案。

公司拥有一支资深的专业技术团队，先后开发研制了八个系列的新型阀门产品，获得了八十多项发明及实用新型国家专利；同时获得国家级TS生产许可证、IS9000、14000、18000等国际质量体系认证、TUV认证、SIL认证、CE认证。公司从原材料、加工、热处理、装配、质检、试验到出厂的每一道工序，高茨人都在严格把控，立于行业标准之先。引进先进的自动化控制装置、加工中心及数控机床等生产设备，保证了产品质量及精度的高度统一。采用无损检测、光谱分析、三维测量仪及阀门综合性能测试检验等，确保了产品使用寿命的长效稳定。采用二维码防窜平台，实现产品精准管控。高茨，以一往无前的决心，铸就用户满意的产品。

十五年来，先后以“奥德森”、“翰达”、“德尔斯威”、“高茨”等知名品牌，生产的双偏心高性能蝶阀、双偏心金属密封蝶阀、三偏心金属硬密封蝶阀、三偏心U型金属密封蝶阀、高性能球阀、长输管线球阀、各类智能调节控制阀以及高端闸阀、截止阀、止回阀、等成套阀门。广泛应用于空分、空调、冶金、矿山、电子、石油、化工生物、医药、核电、火电、水电、供水、供暖、燃气、造纸、长输管线等领域，在行业内具有很高的声誉。

公司生产的超高性能双偏心蝶阀，高性能球阀及各种智能型调节控制阀门，具有卓越的技术性能和独特的密封结构：

超高性能的双偏心蝶阀，该蝶阀具有独特的密封结构，动静密封均采用高分子材料聚四氟乙烯（PTFE），阀座采用G型的弹性密封结构，具有抗疲劳、抗老化、自润滑、自动补偿、双向零泄漏等特点；从而达到高速度，高频率，高寿命等良好效果，在空分制氧的变压吸附工艺的设备上使用并测试，其寿命能达到100~300万次。

高性能球阀，具有独特的弹性及自动补偿的密封结构，密封性能好，扭矩轻，寿命长等特点，并且有防火、防静电等功能。

各种智能型调节控制阀门，能合理适应于各种恶劣工况，反应灵敏、精确度高、执行机构及附件布局合理、参数匹配。

随着品牌日渐成熟，高茨对于产品的售后服务也愈加完备。24小时线上客服随时解答疑难，全国各地线下快速响应维护，每一个细节的背后都是高茨对品质的责任。在纷繁复杂的市场中坚守初心，不负众信。

在未来，高茨将继续秉持“专业铸就品牌，诚信创造价值”的企业宗旨，在日新月异的创新浪潮中，以发展核心技术，引领高端阀门配套产业走向世界前列。

Hunan Gaoci Control System Technology Co., Ltd. was founded in 2006. We utilized the imported technologies from Germany. Including: double eccentric high-performance butterfly valves, high-performance ball valves, and self-controlling valves. All are an accumulation of “Audson”, “Handa” and “DESW” brand extension. With this cutting-edge technology, our valves are the first domestically-created substitute imported products, whose performance and quality reach the international level. We have devoted ourselves to provide complete valve and whole-set fluid control system solutions to our global customers.

The company has developed a recognized senior and professional technical team, which has developed eight series of new valve products. They have obtained more than 80 national patents for inventions and utility models. At the same time obtained a national TS production license, IS9000, 14000, 18000, etc. International quality system certification, TUV certification, SIL certification, CE certification.

The company maintains control over every process from raw materials, processing, heat treatment, assembly, quality inspection, testing, which is strictly controlled by the Gaoci team. We are pride ourselves on being ahead of the industry standard.

The introduction of advanced automatic control devices, machining centers, CNC machine tools, and other production types of equipment ensures a high degree of uniformity in product quality and precision. We use non-destructive testing, spectrum analysis, three-dimensional measuring instrument and valve comprehensive performance testing and inspection, etc., to ensure the long-term stability of the product life. The two-dimensional code anti-channeling platform is adopted to achieve precise product control. Qualzess, with unrelenting determination, creates safe products to satisfy customers' needs.

For fifteen years, we have successively produced double eccentric high-performance butterfly valves, double eccentric metal seal butterfly valves, and triple eccentric metal hard seals under well-known brands of "Audson", "Handa", "DESW", and "Qualzess".

Butterfly valves, triple eccentric U-shaped metal-sealed butterfly valves, high-performance ball valves, long-distance pipeline ball valves, various intelligent regulating control valves, and high-end gate valves, globe valves, check valves, and other complete sets of valves.

It is widely used in air separation, air conditioning, metallurgy, mining, electronics, petroleum, chemical biology, medicine, nuclear power, thermal power, hydropower, water supply, heating, gas, paper, long-distance pipelines, and other fields. We have a high reputation in the industry.

The ultra-high-performance double eccentric butterfly valve, high-performance ball valve, and various intelligent control valves, produced by the company, have excellent technical performance and a unique sealing structure.

Ultra-high performance double eccentric butterfly valve. The butterfly valve has a unique sealing structure that both dynamic and static seals are made of polymer material polytetrafluoroethylene (PTFE). The valve seat adopts a G-type elastic sealing structure, which is anti-fatigue, anti-aging and self-lubricating, automatic compensation, two-way zero leakage, etc. It can achieve high speed, high frequency, long life, and other good effects, which have been used and tested on the pressure swing adsorption process equipment for air separation oxygen production. Their life span can reach 1 to 3 million times.

The high-performance ball valve has a unique elastic and self-compensating sealing structure, good sealing performance, light torque, long life, fire prevention, and anti-static.

Various intelligent regulating and controlling valves can be reasonably adapted to various harsh working conditions, with a sensitive response, high accuracy, reasonable layout of actuators and accessories, and parameter matching.

Gaoci's after-sales service for products includes 24-hour online customer service answers questions at any time. We quickly respond to maintenance all over the country. Behind every detail is Gaoci's responsibility for quality.

In the future, Gaoci will continue to uphold the corporate tenet of "professionalism, brand quality, integrity, and global standards". In the ever-changing wave of innovation, "We will lead the high-end valve industry to the forefront of the world by developing core technologies."

## 资质证书

Certifications



## 旗下品牌

Brands of Qualzess





## 零缺陷管控

Zero Defect Control



严格的检测是产品质量的保证。不让一点瑕疵出现，不让质量问题损害我们的品牌是我们的宗旨。我们建立了一整套合理的、有序的检测程序，在“我们追求零缺陷”思想的指导下，高茨控制绝不让一件不合格的产品出厂，我们相信这既是对客户负责，更是对我们自己负责。

Strict supervision is the guarantee to product quality. It is our tenet to avoid the occurrence of any defect and prevent quality problems from damaging our brand. We have established a complete set of reasonable and orderly inspection procedures. Guided by the thoughts of "pursuing zero failure", we will never sell one unqualified product to clients. We believe that it not only means the responsibility for customers, but also for ourselves.

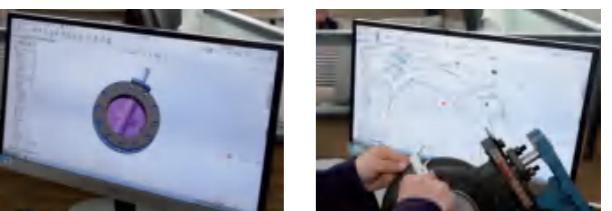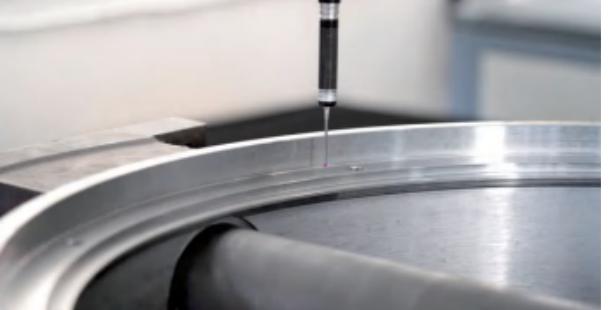

## 过程零缺陷是高茨控制产品性能可靠的保障

Zero Defect Process Is The Guarantee Of Reliable Performances Of Qualzess Products.

# 成套系统解决方案

Whole-set System Solution

D800W系列工业生产自动化蝶阀 D800W Series Pneumatic Butterfly Valve	D800W系列气动蝶阀 D800W Series Pneumatic Butterfly Valve	L90 焊接式蝶阀 L90 Butt Welded Butterfly Valve	D800G系列电动蝶阀 D800G Series Electrical Butterfly Valve
			
<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> <li>Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>G-type valve seat with automatic compensation design keeps reliable sealing,</li> <li>Oil-free self-lubricating bushing</li> <li>Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>Anti-static design</li> </ul>	<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> <li>Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>G-type valve seat with automatic compensation design keeps reliable sealing,</li> <li>Oil-free self-lubricating bushing</li> <li>Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>Anti-static design</li> </ul>	<ul style="list-style-type: none"> <li>双流向均可承压、实现无流向限制的安装方式</li> <li>金属对金属扭矩密封</li> <li>可更换的阀座和密封环设计</li> <li>阀座采用全金属锻造而成，并在密封面喷焊司太立合金</li> <li>抗冲刷、寿命长、耐磨损</li> <li>Both flow directions can bear pressure and realize installation without flow direction restriction the way</li> <li>Metal to metal torque seal</li> <li>Replaceable valve seat and seal ring design</li> <li>The valve seat is made of all metal forging, and sprayed on the sealing surface Welding Stellite</li> <li>Erosion resistance, long life, wear resistance</li> </ul>	<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> <li>Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>G-type valve seat with automatic compensation design keeps reliable sealing,</li> <li>Oil-free self-lubricating bushing</li> <li>Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>Anti-static design</li> </ul>
尺寸 (mm) : 50~1200 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、150LB、5K、10K、16K 连接方式: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~1200 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 150LB, 5K, 10K, 16K Connection mode: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 1.6、2.5、4.0、300LB、20K、30K 连接方式: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -50~425 Pressure (Mpa): 1.0, 1.6, 2.0, 150LB, 300LB Connection method: butt welding, sleeve welding GB, ANSI, JIS, DIN	尺寸 (mm) : 50~2000 温度 (°C) : -196~425 压力 (Mpa) : 1.0、1.6、2.0、150LB、300LB 连接方式: 对焊, 套焊GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -196~425 Pressure (Mpa): 1.0, 1.6, 2.0, 150LB, 300LB Connection method: butt welding, sleeve welding GB, ANSI, JIS, DIN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、2.0、150LB、5K、10K、16K 连接方式: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 2.0, 150LB, 5K, 10K, 16K Connection mode: Wafer GB, ANSI, JIS, DIN, EN
阀体/蝶板: CF8、CF8M、CF3M、CF3、2205、2507、Monel、HC、TA2 阀杆: 17~4PH、F316、F304、F51 阀座: 聚四氟乙烯密封圈 PTFE、RPTFE、PPL、TFM、UHMW-PE Valve body/butterfly plate: CF8, CF8M, CF3M, CF3, 2205, 2507, Monel, HC, TA2 Stem: 17~4PH, F316, F304, F51 Valve seat: Teflon sealing ring PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜 阀杆: 17~4PH、不锈钢、合金钢 阀座: SUS304 +WC、SUS 316 +WC、SUS304 +STL、SUS+STL Valve body/butterfly plate: forged steel, stainless steel, alloy steel Stem: 17~4PH, stainless steel, alloy steel Valve seat: SUS304 +WC, SUS 316 +WC, SUS304 +STL, SUS+STL Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze Stem: 17~4PH, stainless steel, alloy steel Valve seat: SUS304 +WC, SUS 316 +WC, SUS304 +STL, SUS+STL	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE Valve body/butterfly plate: forged steel, stainless steel, alloy steel Stem: 17~4PH, stainless steel, alloy steel Valve seat: SUS304 +WC, SUS 316 +WC, SUS304 +STL, SUS+STL	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE
适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业 Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业 Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 橡胶和聚四氟乙烯所无法控制的高温流体。可以替代闸阀、球阀使用。水蒸气、空气、燃气、废气、亚硫酸气体、废气、氮气、焦化气、城市气体、工业生产自动化等行业 Suitable for: rubber and PTFE can not be controlled High temperature fluid. It can be used instead of gate valve and ball valve. water steam, air, gas, exhaust gas, sulfuric acid gas, Nitrogen. Mainly used for heating, low pressure steam and other working conditions.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业 Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.

D800W系列电液联动蝶阀  
D800W Series Electro-hydraulic Butterfly Valve      D800D系列气动高频蝶阀  
D800D Series Pneumatic high frequency Butterfly Valve      DBGA8150/816-CF衬氟蝶阀  
DBGA8150/816-CF Fluorine-lined Butterfly Valve      D800W系列手自一体式蝶阀  
D800W Series Automation with manual Butterfly Valve



<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> <li>Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>G-type valve seat with automatic compensation design keeps reliable sealing,</li> <li>Oil-free self-lubricating bushing</li> <li>Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>Anti-static design</li> </ul>	<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> <li>Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>G-type valve seat with automatic compensation design keeps reliable sealing,</li> <li>Oil-free self-lubricating bushing</li> <li>Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>Anti-static design</li> </ul>	<ul style="list-style-type: none"> <li>标准的ISO5211安装平台设计</li> <li>中线衬PTFE PFA</li> <li>耐腐蚀，高性能</li> <li>密封性能好，适用寿命长</li> <li>Standard ISO5211 installation platform design</li> <li>Center line lining PTFE PFA</li> <li>Corrosion resistance, high performance</li> <li>Good sealing performance, long service life</li> </ul>	<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> <li>Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>G-type valve seat with automatic compensation design keeps reliable sealing,</li> <li>Oil-free self-lubricating bushing</li> <li>Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>Anti-static design</li> </ul>
--	--	--	--

尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、2.0、150LB、5K、10K、16K 连接方式: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 2.0, 150LB, 5K, 10K, 16K Connection mode: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、2.0、150LB、5K、10K、16K 连接方式: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 2.0, 150LB, 5K, 10K, 16K Connection mode: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 40~500 温度 (°C) : -20~150 压力 (Mpa) : 1.0、1.6、150LB、10K 连接方式: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 40~500 Temperature (°C): -20~150 Pressure (Mpa): 1.0, 1.6, 150LB, 10K Connection method: wafer type, flange type GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、2.0、150LB、5K、10K、16K 连接方式: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 2.0, 150LB, 5K, 10K, 16K Connection mode: Wafer GB, ANSI, JIS, DIN, EN
--	--	--	--

阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE Valve body/butterfly plate: forged steel, stainless steel, alloy steel Stem: 17~4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢
---	--------------

D800L系列凸耳式气动蝶阀 D800L Series Lug Type Pneumatic Butterfly Valve	D800L系列凸耳式蝶阀 D800L Series Lug Type Butterfly Valve	D800L系列凸耳式蜗轮蝶阀 D800L Series Lug Type Geared Butterfly Valve	D800D系列双法兰蝶阀 D800D Series Double Flanged Butterfly Valve	D800W系列高压蜗轮蝶阀 D800W Series High Pressure Geared Butterfly Valve	D800W系列高压蝶阀 D800W series High Pressure Bare Shaft with Bracket Butterfly Valve	D800G高平台蝶阀 D800G High-platform Pneumatic Butterfly Valve	D800G高平台蝶阀 D800G High-platform Butterfly Valve
							
<ul style="list-style-type: none"> <li>• 双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>• 带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>• 独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>• 防飞出设计防止阀杆被破坏吹出</li> <li>• 防静电设计</li> <li>• Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>• G-type valve seat with automatic compensation design keeps reliable sealing, Oil-free self-lubricating bushing</li> <li>• Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>• Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>• Anti-static design</li> </ul>	<ul style="list-style-type: none"> <li>• 双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>• 带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>• 独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>• 防飞出设计防止阀杆被破坏吹出</li> <li>• 防静电设计</li> <li>• Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>• G-type valve seat with automatic compensation design keeps reliable sealing, Oil-free self-lubricating bushing</li> <li>• Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>• Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>• Anti-static design</li> </ul>	<ul style="list-style-type: none"> <li>• 双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>• 带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>• 独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>• 防飞出设计防止阀杆被破坏吹出</li> <li>• 防静电设计</li> <li>• Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>• G-type valve seat with automatic compensation design keeps reliable sealing, Oil-free self-lubricating bushing</li> <li>• Unique packing for dynamic load compensation seal design eliminates the valve Leakage</li> <li>• Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>• Anti-static design</li> </ul>	<ul style="list-style-type: none"> <li>• 双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>• 带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>• 独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>• 防飞出设计防止阀杆被破坏吹出</li> <li>• 防静电设计</li> <li>• Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>• G-type valve seat with automatic compensation design keeps reliable sealing, Oil-free self-lubricating bushing</li> <li>• Unique dynamic load compensation seal design packing to prevent valve leakage</li> <li>• Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>• Anti-static design</li> </ul>	<ul style="list-style-type: none"> <li>• 双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>• 带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>• 独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>• 防飞出设计防止阀杆被破坏吹出</li> <li>• 防静电设计</li> <li>• 标准的ISO5211安装平台设计</li> <li>• Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>• G-type valve seat with automatic compensation design keeps reliable sealing, Oil-free self-lubricating bushing</li> <li>• Unique dynamic load compensation seal design packing to prevent valve leakage</li> <li>• Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>• Anti-static design</li> <li>• Standard ISO5211 installation platform design</li> </ul>	<ul style="list-style-type: none"> <li>• 双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>• 带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>• 独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>• 防飞出设计防止阀杆被破坏吹出</li> <li>• 防静电设计</li> <li>• 标准的ISO5211安装平台设计</li> <li>• Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>• G-type valve seat with automatic compensation design keeps reliable sealing, Oil-free self-lubricating bushing</li> <li>• Unique dynamic load compensation seal design packing to prevent valve leakage</li> <li>• Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>• Anti-static design</li> <li>• Standard ISO5211 installation platform design</li> </ul>	<ul style="list-style-type: none"> <li>• 双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>• 带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>• 独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>• 防飞出设计防止阀杆被破坏吹出</li> <li>• 防静电设计</li> <li>• 标准的ISO5211安装平台设计</li> <li>• Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>• G-type valve seat with automatic compensation design keeps reliable sealing, Oil-free self-lubricating bushing</li> <li>• Unique dynamic load compensation seal design packing to prevent valve leakage</li> <li>• Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>• Anti-static design</li> <li>• Standard ISO5211 installation platform design</li> </ul>	<ul style="list-style-type: none"> <li>• 双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>• 带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>• 独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>• 防飞出设计防止阀杆被破坏吹出</li> <li>• 防静电设计</li> <li>• 标准的ISO5211安装平台设计</li> <li>• Double eccentric design makes the butterfly plate and the sealing surface separate quickly, reducing friction, high frequency and long service life</li> <li>• G-type valve seat with automatic compensation design keeps reliable sealing, Oil-free self-lubricating bushing</li> <li>• Unique dynamic load compensation seal design packing to prevent valve leakage</li> <li>• Anti-flying design prevents the valve stem from being damaged and blown out</li> <li>• Anti-static design</li> <li>• Standard ISO5211 installation platform design</li> </ul>
尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 1.0、1.6、150LB、10K、16K 连接标准: GB、ANSI、JIS、DIN、EN  Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 1.0, 1.6, 150LB, 10K, 16K Connection standards: GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 1.0、1.6、150LB、10K、16K 连接标准: GB、ANSI、JIS、DIN、EN  Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 1.0, 1.6, 150LB, 10K, 16K Connection standards: GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 2.5、4.0、6.3、10、300LB、600LB 连接标准: GB、ANSI、JIS、DIN、EN  Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 1.0, 1.6, 150LB, 30K, 40K Connection standards: GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 1.0、1.6、150LB、30K、40K 连接方式: 对夹GB、ANSI、JIS、DIN、EN  Size (mm): 50~600 Temperature (°C): -50~250 Pressure (Mpa): 6.3, 10, 600LB, 30K, 40K Connection mode: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~600 温度 (°C) : -50~250 压力 (Mpa) : 6.3、10、600LB、30K、40K 连接方式: 对夹GB、ANSI、JIS、DIN、EN  Size (mm): 50~600 Temperature (°C): -50~250 Pressure (Mpa): 6.3, 10, 600LB, 30K, 40K Connection mode: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~1200 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、150LB、5K、10K、16K 连接方式: 对夹GB、ANSI、JIS、DIN、EN  Size (mm): 50~1200 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 150LB, 5K, 10K, 16K Connection mode: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~1200 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、150LB、5K、10K、16K 连接方式: 对夹GB、ANSI、JIS、DIN、EN  Size (mm): 50~1200 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 150LB, 5K, 10K, 16K Connection mode: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~1200 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、150LB、5K、10K、16K 连接方式: 对夹GB、ANSI、JIS、DIN、EN  Size (mm): 50~1200 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 150LB, 5K, 10K, 16K Connection mode: Wafer GB, ANSI, JIS, DIN, EN
阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE  Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE  Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE  Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE  Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: PTFE sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE  Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: PTFE sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE  Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: PTFE sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE  Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: PTFE sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17~4PH, 不锈钢, 合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE  Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17~4PH, stainless steel, alloy steel Valve seat: PTFE sealed PTFE, RPTFE, PPL, TFM, UHMW-PE
适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业  Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业  Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业  Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业  Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业  Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业  Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业  Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业  Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.

D800W系列手动蝶阀 D800W Series Handwheel Butterfly Valve	D800W系列涡轮蝶阀 D800W Series Geared Butterfly Valve	D800W系列加长杆蝶阀 D800W Series Long-stem Butterfly Valve	D800W系列中压涡轮蝶阀 D800W series Middle-pressure Butterfly Valve
			
<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> </ul>	<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> </ul>	<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> </ul>	<ul style="list-style-type: none"> <li>双偏心设计使蝶板与密封面快速分离，减少摩擦，高频率高使用寿命</li> <li>带自动补偿设计的G型阀座保持可靠密封，无油自润滑轴套</li> <li>独特的动载补偿密封设计填料，杜绝了阀门外漏</li> <li>防飞出设计防止阀杆被破坏吹出</li> <li>防静电设计</li> </ul>
尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、150LB、5K、10K、16K 连接标准: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 150LB, 5K, 10K, 16K Connection standard: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、150LB、5K、10K、16K 连接标准: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 150LB, 5K, 10K, 16K Connection standard: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~2000 温度 (°C) : -50~250 压力 (Mpa) : 0.6、1.0、1.6、150LB、5K、10K、16K 连接标准: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~2000 Temperature (°C): -50~250 Pressure (Mpa): 0.6, 1.0, 1.6, 150LB, 5K, 10K, 16K Connection standard: Wafer GB, ANSI, JIS, DIN, EN	尺寸 (mm) : 50~1200 温度 (°C) : -50~250 压力 (Mpa) : 2.5、4.0、300LB、20K、30K 连接标准: 对夹GB、ANSI、JIS、DIN、EN Size (mm): 50~1200 Temperature (°C): -50~250 Pressure (Mpa): 2.5, 4.0, 300LB, 20K, 30K Connection standard: Wafer GB, ANSI, JIS, DIN, EN
阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17-4PH、不锈钢、合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17-4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17-4PH、不锈钢、合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17-4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17-4PH、不锈钢、合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17-4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE	阀体/蝶板: 球铁、碳钢、锻钢、不锈钢、合金钢、铝青铜、Monel、HC、TA2 阀杆: 17-4PH、不锈钢、合金钢 阀座: 聚四氟乙烯密封 PTFE、RPTFE、PPL、TFM、UHMW-PE Valve body/butterfly plate: ductile iron, carbon steel, forged steel, stainless steel, Alloy steel, aluminum bronze, Monel, HC, TA2 Stem: 17-4PH, stainless steel, alloy steel Valve seat: Teflon sealed PTFE, RPTFE, PPL, TFM, UHMW-PE
适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业 Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业 Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业 Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.	适用于: 纯水、空调冷温水、海水、水、福尔马林溶液、有机溶剂、空气、氧气、废气、氮气、焦化气、城市气体、工业生产自动化等行业 Applicable to: pure water, air-conditioning cold and warm water, sea water, water,formalin solution, organic solvent, air, oxygen,exhaust gas, nitrogen, coking gas, city gas, and other automation production industries.

## 蝶阀型号编制说明

Illustration Of Categorizing Of The Butterfly Valve Model

1	2	3	4	—	5	—	6	7	8	9	—	10
DB	A	8	150	—	M	—	20	17	34	TT	—	6"(DN150)

例如：要订购标准型、美标、对夹式、150磅级、手动、阀体材料为WCB，阀杆材料为17-4PH，蝶板材料为CF8，密封材料为PTFE，阀门通径为6”(DN150)的蝶阀。

For example: to order standard type, American standard, wafer type, 150 pounds, manual, valve body material is WCB, stem material is 17-4PH, butterfly plate material is CF8, sealing material is PTFE, valve diameter is 6'(DN150) butterfly valve.

**型号编写为：DBA8150-M-201734TT-6”**

The model is written as: DBA8150-M-201734TT-6”

1	阀门的特征代号	Valve feature code
DB	标准型	Standard code
DF	防火型(耐火型)	Fireproof type (fire resistant type)
DG	高平台型	High platform type

2	设计标准代号	Design standard code
G	国标	GB.JB
A	美标	ANSI
J	日标	JIS
D	德标	DIN
B	英标	BS

3	连接形式代号	Connection type code
8	对夹式	Wafer type
6	焊接式	Welded type
5	多耳式(单法兰)	Lug type (single flange)
4	法兰式(双法兰)	Flange type (double flange)

4	压力等级代号 Pressure class code
150	ANSI CLASS 150Lb
300	ANSI CLASS 300 Lb
600	ANSI CLASS 600 Lb
010	JB79-94, PN10
016	JB79-94, PN16
025	JB79-94, PN25
040	JB79-94, PN40
100	JB79-94, PN100
10K	JIS 10K
20K	JIS 20K
30K	JIS 30K
40K	JIS 40K

5	驱动方式代号	Driving mode code
M	手动	Manual
K	光杆	Bare shaft
G	蜗轮传动	Worm gear
P	气动	Pneumatic
D	电动	Electric
Y	液动	Surge

6	阀体材料代号	Body material code
20	碳钢WCB	Carbon steel
34	不锈钢CF8	Stainless steel
36	不锈钢CF8M	Stainless steel
41	不锈钢 CF3	Stainless steel
61	不锈钢 CF3M	Stainless steel
66	蒙乃尔	Monel
88	哈氏合金	Ha's alloy

7	阀杆材料代号	Stem material code
17	马氏体不锈钢17-4PH	Martensite stainless steel 17-four PH
34	不锈钢304	Stainless steel 304
36	不锈钢316	Stainless steel 316
13	不锈钢1CR13	Stainless steel CR13 1
23	不锈钢2CR13	Stainless steel CR13 2

8	蝶板材料代号	Butterfly plate material code
22	碳钢+不锈钢(或合金钢)	Carbon steel and stainless steel (or alloy steel)
00	与阀体材料相同	And the same body material
34	不锈钢CF8	Stainless steel CF8
36	不锈钢CF8M	Stainless steel CF8M
41	不锈钢 CF3	Stainless steel CF3
61	不锈钢 CF3M	Stainless steel CF3M

9	密封阀座的材料代号 Seal of the seat material code
TT	PTFE聚四氟乙烯
MT	RPTFE增强聚四氟乙烯
PL	对位聚苯PPL
PK	PEEK
YT	耐烧合金钢+PTFE
TF	TFM1600/1700

## 概述

### Summary

超高性能蝶阀是本公司自行研制并引进德国“QUALZESS”的专利产品。该蝶阀具有超独特的产品结构，超可靠的密封性能，超广阔的工况条件，超低小的操作扭矩，超长久的使用寿命，特殊工况安全防火，同类产品处于世界领先地位。

The ultra high performance butterfly valve is a patented product independently researched and developed by our company through introducing technology from Germany “MAYER”. The butterfly valve has ultra unique product structure, ultra reliable sealing performance, ultra wide working conditions, ultra low operating torque and ultra long service life. It is safe and fireproof under special working conditions, staying at the leading position among other similar products in the world.

### 阀门尺寸有 Valve size includes

DBA8150 (对夹式)	2"~80"	(DN50~2000)
DBA5/4150 (单/双法兰式)	2 1/2"~80"	(DN65~2000)
DFA8150 (防火型)	3"~80"	(DN80~2000)
DBA8300 (对夹式)	2"~80"	(DN50~2000)
DBA5/4300 (单/双法兰式)	2 1/2"~80"	(DN65~2000)
DFA8300 (防火型)	3"~80"	(DN80~2000)
DBA9150 (对夹式)	2"~80"	(DN50~2000)



该系列高性能对夹式蝶阀使用多种结构材料，包括符合NACE要求和抗磨蚀的。并可提供用于氯气、氧气、高真空和腐蚀生介质及低温环境的特殊阀门。

The series of high performance wafer type butterfly valves uses various structure materials, including those that meet NACE requirements, and anticorrosive materials. Special valves that can be used in chlorine, oxygen, high vacuum, corrosive media, and cryogenic condition are also available.

### 特点 Features

- 使用独特的动载密封PTFE阀座设计，弹性好，可靠性高；
- 无须增加O形圈或金属部件来保持密封；
- 唇缘式密封结构可补偿温度和压力的变化；
- 使用寿命长，维修量小；
- 密封试验，双向达到无气泡泄漏。

The unique dynamic load seal PTFE seat design is adopted with good elasticity, and high reliability.

The sealing can be maintained without adding O-shape ring or any metal part.

The lip-edge sealing structure can compensate for the changes of temperature and pressure.

It boasts of a longer working life, and a smaller capacity of repairs.

In seal test, there are no bubble, or leakage at both directions.

### 偏置轴和偏心蝶板设置 Design of offset shaft and eccentric butterfly plate

- 在开启和处于中间位置时阀座与蝶板不发生接触；
- 在阀座上下部位无磨损点；
- 扭矩低，操作机构要求小。
- The seat and butterfly plate do not contact each other when the valve is opened or at the middle position.
- There is no wear point at the upper, and lower parts of the seat.
- Low torque with low requirements for operating mechanism.

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 产品结构特征

### Structure Features Of Products

超高性能双偏心蝶阀，除常规阀门所适应的工况介质外根据不同的介质，选用了不同结构材料和特殊处理材料,还可用于深冷、蒸汽、氯气、氧气、高真空、抗腐蚀等特殊工况。

Apart from the suitable working conditions, and media for conventional valves, the ultra-high-performance double eccentric butterfly valve, when adopted different structural materials and special processing materials according to different kinds of medium, can also be used for copious cooling, steam, and chlorine.

### 阀门的整体结构 Integral structure of the valve

轴顶部的扁显示蝶板的正确位置  
The flat tongue at the top of the valve indicates the correct position of the butterfly plate

PTFE衬里的不锈钢轴承，耐腐蚀性高，并能自润滑  
The PTFE-lined stainless steel bearing is highly anti-corrosive and self-lubricating.

止推垫圈保持蝶板的中心位置  
The thrust washer maintains the central position of the butterfly plate.

压入式的直销使阀杆与蝶板结合更稳定，同时外观更整洁，有效增强介质的流通性能。  
The press-in straight pin makes the stem and the butterfly plate link more stably, and the appearance cleaner, which effectively enhances the flowing capacity of media.

整体式单直径轴把偏差减小到最低。  
The integral single diameter shaft reduces deviation to the minimum extent.

蝶板设计使该阀门的最高扭矩点低于常规阀门。  
The design of the butterfly plate makes the tip of the valve's torque lower than that of the conventional ones.

S型弹性密封阀座，确保关闭可靠,可自动补偿磨损。  
The S-shape elastic airproof seat ensures reliable closing and automatically compensates for wear.

拆卸阀座，不需要拆轴和蝶板。  
The seat can be disassembled without the need of removing the shaft and butterfly plate.

## 独特的阀座密封结构 Unique Seat Sealing Structure

传统的中线蝶阀是衬氟或衬胶，而本公司采用的德国迈尔引进和自行研制改进的独立单一体的G型弹性密封阀座结构，使用了进口的RPTFE材料，弹性好，寿命长，可自动补偿温度和压力的变化，以及因长期开关使用而磨损的密封补偿;能达到双向密封无泄漏;采用活动嵌件结构，保养快捷方便，不必拆卸蝶板和阀杆，只要单面取下嵌件，即可更换密封阀座和检修密封面。

The traditional central line butterfly valve is lined with fluorine or rubber, but the S-shape elastic airproof seat structure independently researched, and developed by our company through introducing technology from Germany MAYER adopts the imported RPTFE material with good elasticity, and long working life. It can automatically compensate for the changes of temperature and pressure and can realize sealing compensation for the wear due to long time opening, closing and use. It can realize double-direction sealing without any leakage as well. And it adopts mobile inserts structure, which its quick and easy to upkeep and convenient without the need of removing the butterfly plate and stem. The seal seat can be replaced, and the sealing face can be repaired just through taking off the inserts at one side.


## 阀座密封 Seat Sealing

ANSI/FCI 70-2 规定了控制阀的泄漏等级和试验程序。其中VI级为最低泄漏等级。高性能对夹式蝶阀能达到MSS- SP61规定的无气泡密封，要高于VI级。

ANSI/FCI 70-2 stipulated the control valve leakage level and test procedures. Among them, the VI level is the lowest leakage level. High performance wafer-style butterfly valve can reach the specification of MSS SP61 ,which prescribed no bubble seal, higher than the VI level.


阀门关闭时蝶板使阀座稍稍变形，这一变形“激励”了阀座。阀座密封面的激励使它与蝶板的边缘保持持久的密封。

When the valve is closed, the butterfly plate makes the seat slightly deform. The deformation excites the seat and the seat seals. The stimulation of surface of the seat sealing enables permanent sealing to be maintained between the surface and the edges of the butterfly plate.




当嵌件侧受压时，压力被施加于唇缘的下方进一步加大了蝶板与阀座之间的密封力。

When the inserts receive pressure, the pressure is exerted at the bottom of the lip edge, which further increases the sealing force between the butterfly plate and seat.

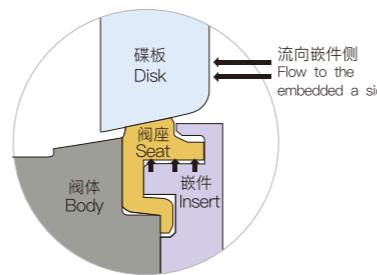

当压力施加于非嵌件的一侧时，蝶板被推向阀座。由于蝶板的轮廓呈球形，蝶板越向阀座推进，关闭就越紧密。唇缘与嵌件底部的槽接触，限制了阀座的过量移动。

When the pressure is exerted at the non-insert side, the butterfly plate is pushed towards the seat. As the butterfly plate is ball shape, the further the butterfly plate is pushed towards the seat, the tighter the closing will be. The common border of the lip edge and the bottom of the inserts, limits the excessive movement of the seat.



以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 防火耐火结构 Fireproof structure

耐火型蝶阀按API607标准进行设计执行，经过火烧试验。在阀门的使用现场发生火灾时，当聚四氟乙烯等非金属材料制作的阀尾密封圈在高温下分解或破坏时，能借助金属辅助内压自密封结构，起到瞬间密封作用，可有效阻止介质的大量泄漏，控制火灾的蔓延和扩大。

The fire-resistant butterfly valve is designed according to API607 standard, and is subjected to fire testing. If the fire occurs on spot, and the seal ring made of non-metal materials such as PTFE is decomposed or damaged under high temperature, the valve can instantly seal with the help of the structure of metal-aided inside pressure self-sealing, which can effectively prevent large amount of leakage and fire spreading.

## 偏心阀轴和偏心蝶板的设计结构 Design structure of eccentric valve shaft and eccentric butterfly plate

阀杆采用符合国际标准的高强度不锈钢174PH材料。轴的两端装有不锈钢+RPTFE永久自润滑轴承。蝶板两端配有一止推轴套，能有效的控制蝶板定位，防止金属咬合，降低阀座与蝶板发生摩擦的磨损，保证蝶阀开关频繁的可靠性，大大地减轻阀门开关的扭矩。


Design structure of eccentric valve shaft and eccentric butterfly plate The stem is made of high strength stainless steel 174PH that conforms to international standards. Each end of the shaft is provided with the stainless steel +RPTFE permanent self-lubricating bearing. Each end of the butterfly plate is provided with the thrust bush to effectively control the positioning of butterfly valve, avoid the metal jam, reduce the wear of the seat, and butterfly plate, in order to guarantee the reliability of the opening and closing of the butterfly valve, which largely reduces the opening and closing torque of the valve.

## 独特的开关与控制结构 Unique opening, closing and control structure


2"-6"为手柄开关和近似流量百分比调节控制结构，还可随意按手柄总承的齿轮盘近似流量调整锁定功能，设有开关限位装置;8"以上的蝶阀可根据工况需要合理选型配装蜗轮或电动、气动装置。

For butterfly valves of 2"-6", the handle switch, and approximate flow percentage control structure is adapted. The handle assembly gear plate approximate flow adjusting, and locking function is provided and the switch limit device is also provided. For butterfly valves of 8", and above, They can reasonably choose suitable sets of worm wheel or electric or pneumatic actuator, according to different working conditions.

### 火烧前 Before Fire

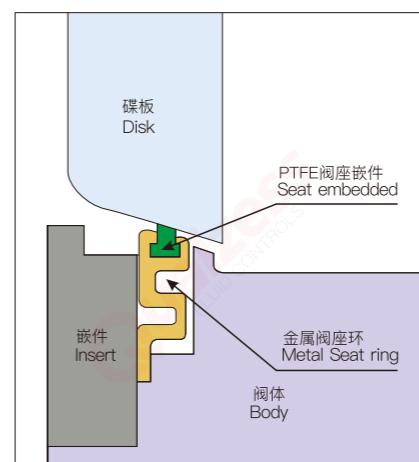

### 火烧时和火烧后 During fire and after fire

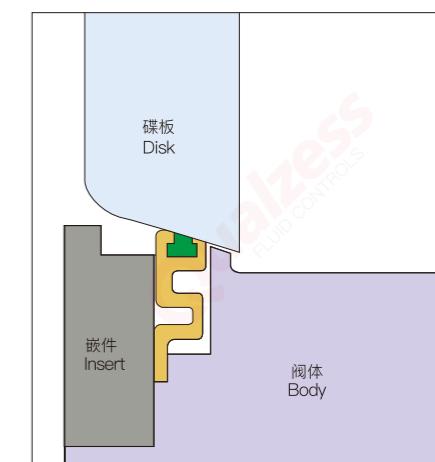

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 特殊工况 Special working conditions

### 蒸气工况 Steam working condition

本对夹式蝶阀，包括PTFE阀座的额定值较低的阀门到Peek阀座很适用于蒸气工况。在蒸气工况作开关用的阀门额定值如下表所列，根据轴材料的选用，额定值会减低。

Wafer type butterfly valves, including valves with PTFE seat with lower rated values, and valves with Peek seat, are suitable for working in steam conditions. The rated values of valves used as a switch in the steam working condition are shown in the following table. The rated values may be decreased according to the selected different shaft materials.

### 氧气工况 Oxygen working condition

本阀门经过特殊处理可用于氧气工况进行断流和控制。在零部件准备、装配、试验和包装方面有一套严格的程序确保清洁、避免氧气与油脂和其它杂质起反应造成内部危险。

After special treatment, the valve can be used for shut-off, and control in oxygen working condition. A series of strict procedures for spare parts; preparation, assembly, test, and packing are followed to ensure cleanliness, and avoid inherent danger caused by reaction of oxygen with grease, and other impurities.

### 真空工况 Vacuum working condition

标准的对夹式蝶阀的额定密封可达到真空间度 $2 \times 10^{-2}$ 托。也可提供真空间度为 $2 \times 10^{-5}$ 托的特殊对夹式高真空间阀门。此外特殊高真空间阀门经确认在真空间度为 $2 \times 10^{-5}$ 托时其氦泄漏率不超过 $2 \times 10^{-5}$ CC/秒。

Standard wafer type butterfly valves are rated for tight shut-off of vacuum of  $2 \times 10^{-2}$  torr. Special high vacuum wafer valves can also be provided for vacuum of  $2 \times 10^{-5}$  torr. In addition, high-vacuum valves are confirmed to below  $2 \times 10^{-5}$  CC/ sec.

### 高寿命的选择 Selection for high service life

包括增强PTFE轴密封、PEEK-增强PTFE止推轴承在内的零部件组合的阀门其使用寿命要大大高于普通阀门。当然，实际的性能取决于介质、压力和温度条件。氧、氮、氢、水及清洁介质使用这-组合是最为理想的。注意:要避免含有酸、氯、溴、二氧化硫、蒸汽介质及温度超过325° F(163°C)工况。

The service life of valves assembled by spare parts such as reinforced PTFE shaft seal, PEEK-reinforced PTFE thrust bearing, and so on are long lasting than that of ordinary valves. Certainly, the actual performances depend on the media, pressure and temperature and other conditions. It is .the most ideal situation that the combination of oxygen, nitrogen, hydrogen, water and clean media is used.

Notice: try to avoid media and temperature such as acid, chlorine, bromine, sulfur dioxide, and steam with temperature exceeding 325° F(163°C) in the working condition.

## 标准与规范

### Standard And Specification

API 609	凸缘式和对夹式蝶阀 Flange type and wafer type butterfly valves	API 607	软密封阀门耐火试验 Soft seal valve fire test
BS6755	英国阀门试验标准第二部分耐火试验要求 British valve testing standard: part II fire testing requirements	API 598	阀门检验和试验 Valve inspection and testing
MSS SP-25	阀门标准标记体系 Valve standard marking system	ANSI B 16.10	铁素体类阀门面对面，端对端尺寸 Face-to-face and end-to-end dimensions of ferrite valves
MSS SP-44	钢制管线法兰 Steel pipe flange	ANSI B 16.5	钢管法兰和法兰连接件 Pipe flanges and flanged fittings
MSS SP-55	钢铸件质量标准 Quality standard for steel castings	ANSI B 16.47	NPS26-NPS60大口径钢法兰 NPS26-NPS60 large diameter steel flange
MSS SP-61	钢阀门压力试验 Pressure testing of steel valves	ANSI B 16.34	法兰端和对焊端钢制阀门 Flange end and butt welding end steel valves
MSS SP-69	阀门和连接件术语 Terminology for valves and connectors	ANSI B31.1	发电厂管道 Power plant pipes
ANSI B 31.3	化工厂和炼油厂管道 Chemical plant and refinery piping	ANSI B31.4	无水氨和酒精，碳氢化合物输送系统 Anhydrous ammonia and alcohol, hydrocarbon transportation system
ANSI B31.8	气体传输和分配管道系统 Gas transportation and distribution pipe system	ANSI/FO 70-2-1991	控制阀门阀座泄漏 Control valve seat leakage

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 额定值

### Rated Value

#### 阀座额定值 Seat rated value

曲线上表示的阀座额定值只对阀座而言，是基于阀门全闭是蝶阀两端的压差。这些额定值可作为通用条件下使用指南。依据以往经验，经过改进和变换其他阀座材料，使用的额定值可更高。对于特殊工况，请向DESW咨询。

The seat rated values indicated on the curve are only for the seat. It is the differential pressure between the two ends of the butterfly valve when the valve is fully closed. These rated values can serve as instructions under general conditions. According to past experience, after updating and changing other seat materials, the rated value they use should be higher. For special working condition, please consult DESW.


#### 阀体额定值 Body rated value

阀体的最大工作压力和各种材料阀体的试验压力示于下面的阀体压力额定值表中。实际工况使用压力要根据阀座额定值来决定。

The maximum working pressure of body and testing pressure of body of various materials are listed in the body pressure ratings table. The actual working pressure in the working conditions shall be decided according to the seat rated values.

150级阀体的额定值 (bar) Rated value of 150lb body (bar)					
温度°C Temperature	碳钢* Carbon steel	球铁* Ductile iron	316不锈钢* Stainless steel	20# alloy	蒙乃尔 Monel
-20 to 38	19.7	17.2	19.0	15.8	15.8
93	17.9	16.2	16.5	13.8	13.8
149	15.8	14.8	14.8	12.4	13.1
204	13.8	13.8	13.4	11.0	12.8
260	11.7	11.7	11.7	10.3	11.7
试验压力	31	27.6	29.3	24.1	24.1

300级阀体的额定值 (bar) Rated value of 300lb body (bar)				
温度°C Temperature	碳钢* Carbon steel	316不锈钢* Stainless steel	20# alloy	蒙乃尔 Monel
-20 to 38	51	49.6	41.4	41.1
93	46.5	42.7	35.9	36.5
149	45.2	38.6	32.1	34.1
204	43.8	35.5	29.0	33.1
260	41.4	33.1	26.9	32.8
试验压力	77.6	75.8	62	62

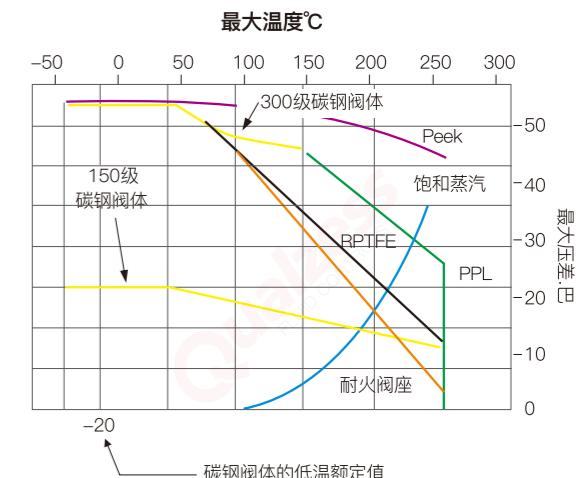

注意: 316不锈钢或20号合金阀杆的14"-80" (DN350-2000)的150级阀门的最大压力差为150psi 316不锈钢或20号合金阀门的3"-36" (DN80-1000)的300级阀门的最大压力差为300psi

Note: The maximum differential pressure of valve of 316 stainless steel or 20# alloy stem, 14"-60" (DN350-1500), 150lb is 150psi. The maximum differential pressure of valve of 316 stainless steel or 20# alloy stem, 3"-36" (DN80-900), 300lb is 300psi.

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 阀门扭矩

Valve Torque

英寸 Inch	DN	lb-ft@ 100psi	N.m@ 6.9bar	lb-ft@ 200psi	N.m@ 13.8bar	lb-ft@ 285psi	N.m@ 19.7bar
2	50	20	28	22	30	23	31
2-1/2	65	21	29	23	31	24	33
3	80	25	34	27	37	29	39
4	100	35	47	39	53	43	58
5	125	48	65	56	76	63	86
6	150	72	97	83	113	93	126
8	200	121	164	142	193	160	217
10	250	163	222	202	274	234	318
12	300	214	290	287	390	350	475
14	350	362	491	505	684	626	849
16	400	463	628	646	876	802	1087
18	450	602	816	844	1144	1050	1423
20	500	810	1098	1140	1546	1421	1926
24	600	1234	1673	1758	2384	2200	2983
28	700	2168	2680	2945	3645	3418	4142
30	750	2170	2942	2940	3966	3595	4873
32	800	2865	3675	3745	5023	4865	6413
36	900	3530	4786	4860	6589	5990	8121
40	1000	5780	7837	8060	10928	10000	13558
44	1100	7312	9413	9685	11265	13654	16793
48	1200	9170	12433	12840	17409	15960	21638
54	1400	12950	17558	17900	24269	222110	29977
60	1500	19020	25790	26040	35310	32000	43397

阀门尺寸 Valve size		150磅级扭矩, 轴处于下游, 防火阀座					
		关闭压差 Closing differential pressure					
英寸 Inch	DN	lb-ft@ 100psi	N.m@ 6.9bar	lb-ft@ 200psi	N.m@ 13.8bar	lb-ft@ 285psi	N.m@ 19.7bar
2	65	42	57	45	61	47	64
3	80	53	72	57	77	59	81
4	100	67	91	74	100	80	108
5	125	97	132	114	155	128	174
6	150	131	178	152	206	170	230
8	200	218	296	256	347	288	391
10	250	333	452	406	550	468	635
12	300	508	589	636	862	745	1010
14	350	604	819	758	1028	889	1205
16	400	710	963	920	1247	1099	1489
18	450	970	1315	1370	1857	1710	2318
20	500	1390	1885	1980	2685	2482	3364
24	600	2050	2779	2700	3661	2200	2983
30	750	2920	3959	3940	5342	4807	6517
36	900	3530	4786	4960	6725	5990	8121
42	1050	5620	7620	7440	10087	10000	13558
48	1200	8800	11931	12100	16405	14905	20208

阀门尺寸		8600和5600蝶阀 轴处于下游时在所示压差下的扭矩											
英寸 Inch	DN	lb-ft@ 600psi	N.m@ 41.4bar	lb-ft@ 800psi	N.m@ 55.2bar	lb-ft@ 1000psi	N.m@ 69bar	lb-ft@ 1200psi	N.m@ 82.8bar	lb-ft@ 1400psi	N.m@ 96.6bar	lb-ft@ 1480psi	N.m@ 102bar
3	80	40	55	45	60	48	65	52	70	55	75	57	77
4	100	115	155	140	190	160	215	185	250	205	280	215	290
6	150	200	270	235	320	275	375	315	400	355	480	370	500
8	200	350	475	435	590	515	700	600	815	680	920	710	965
10	250	620	840	760	1030	900	1220	1040	1410	1180	1600	1240	1685
12	300	980	1330	1190	1615	1410	1915	1625	2210	1840	2500	1930	2620
14	350	1320	1790	1610	2185	1910	2595	2200	2990	2500	3400	2620	3560
16	400	1625	2210	1970	2675	2320	3150	2670	3625	3015	4090	3155	4285
18	450	2090	2840	2550	3460	3010	4090	3470	4710	3930	5340	4115	5590
20	500	2760	3750	3400	4620	4040	5485	4680	6355	5320	7225	5575	7570
24	600	3910	5310	7800	6520	5690	7730	6580	8935	7470	10145	7825	10625


阀门尺寸		8600和5600蝶阀 轴处于上游时在所示压差下的扭矩											
英寸 Inch	DN	lb-ft@ 600psi	N.m@ 41.4bar	lb-ft@ 800psi	N.m@ 55.2bar	lb ft@ 1000psi	N.m@ 69bar	lb ft@ 1200psi	N.m@ 82.8bar	lb ft@ 1400psi	N.m@ 96.6bar	lb ft@ 1480psi	N.m@ 102bar
3	80	44	60	48	65	53	72						
4	100	130	180	155	210	180	245						
6	150	240	325	290	395	345	470						
8	200	365	500	450	610	535	730						
10	250	630	855	770	1045	910	1235						
12	300	1210	1645	1505	2045	1800	2445						
14	350	1545	2100	1920	2610	2290	3110						
16	400	2030	2757	2515									

# 流量参数

## Flow Parameters

下表提供了150磅、300磅、600磅级蝶阀的流量系数。Cv值表示压差为1磅/英寸<sup>2</sup> ( 0.07巴), 温度为60° F ( 15.6°C )时每分钟流过全开启阀门的水流量, 单位为美国加仑/分钟。

150 磅级 Class		
阀门尺寸 Valve size	DN	Cv
2	50	56
2-1/2	65	78
3	80	165
4	100	400
5	125	650
6	150	1050
8	200	2200
10	250	3300
12	300	5100
14	350	5800
16	400	8000
18	450	10500
20	500	14000
24	600	21600
28	700	30800
32	800	34000
36	900	55500
40	1000	78300
48	1200	108300
56	1400	146300
60	1500	159000

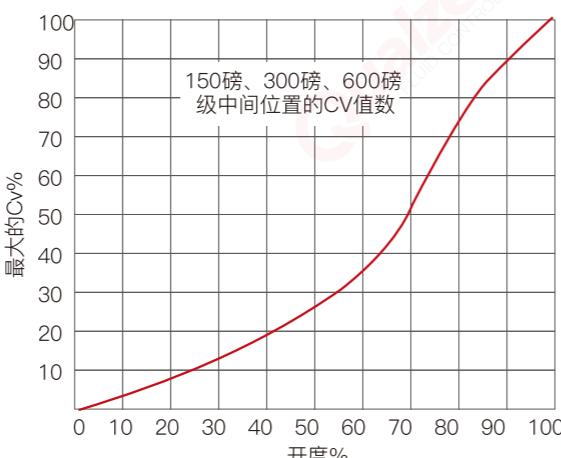

600 磅级 Class		
阀门尺寸 Valve size	DN	Cv
3	80	155
4	100	260
6	150	750
8	200	1350
10	250	2100
12	300	2900
14	350	4000
16	400	5100
18	450	5500
20	500	7950
24	600	11300

300 磅级 Class		
阀门尺寸 Valve size	DN	Cv
2	50	56
2-1/2	65	78
3	80	165
4	100	400
5	125	650
6	150	1050
8	200	1800
10	250	3150
12	300	4750
14	350	5200
16	400	6900
18	450	9300
20	500	11300
24	600	18500
28	700	26800
32	800	29100
36	900	47500

为确定中间位置阀门的Cv值:

To confirm Cv value of the valve at the middle position:

- 从曲线表中确定最大Cv值的百分率
  - 将曲线表中的最大Cv值的百分率乘以流量数据表中的Cv值
1. Confirm the percentage of the maximum Cv value from the curve  
2. Multiply the percentage of the maximum Cv value from the curve by the Cv value from the flow datasheet

例如: 6"(DN150)150级蝶阀70%开度时的Cv值为:


- 从曲线表中确定6" (DN150) 150级蝶阀70%开度时的最大Cv值的百分率为53%
  - 53%的最大Cv值为, Cv值=0.53×1050=560
- For example: The Cv value of the butterfly valve of 6"(DN150), 150lb under opening of 70% is:  
(1) Confirm the percentage of the maximum Cv value of the butterfly valve of 6"(DN150), 150lb under opening of 70% is 53%.  
(2) The maximum Cv value is: Cv value=0.53 X 1050=560

# 8150型对夹式蝶阀

Type 8150 Wafer Butterfly Valve

2至12英寸ANSI 150级 GB PN10/PN16

2"~12" inches ANSI Class 150 GB PN10/PN16

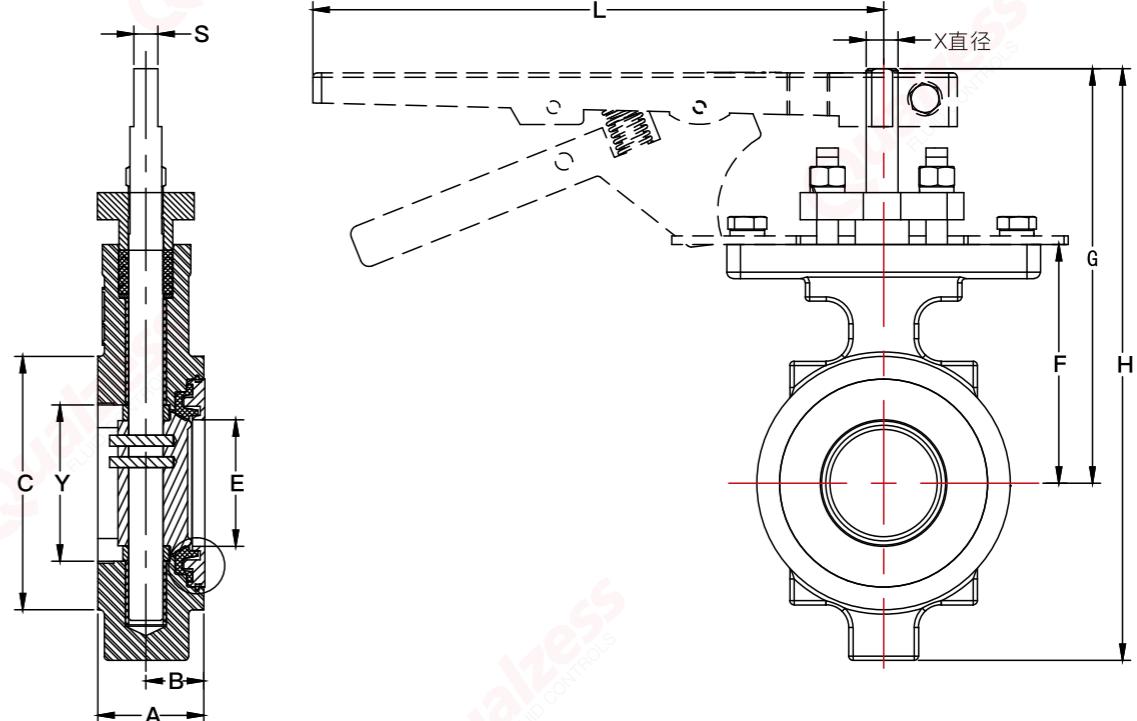


近似尺寸 Approximate size (毫米mm)												近似重量(公斤) Weight(kg)
阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	L	S 偏 槵	X	Y	近似重量(公斤) Weight(kg)
2" (50)	43	23	96	48	80	124	186	230	7	10	58	3.1
2-1/2"(65)	49	27	119	68	111	194	275	230	11.2	14.8	73	4.8
3"(80)	49	27	132	80	121	203	316	230	11.2	14.8	84	5.2
4"(100)	54	30	157	103	133	216	341	280	11.2	14.8	106	7.3
5"(125)	57	30	186	118	135	217	362	280	11.2	14.8	124	9
6"(150)	57	33	216	148	152	235	384	280	14	18	150	12.4
8"(200)	64	36	270	193	187	270	464		15.9	21.9	196	20.9
10 "(250)	71	41	324	240	232	325	560		20.6	28	244	33.1
12"(300)	81	48	381	286	260	359	632		23.8	33.3	290	51.4

## 8150型对夹式蝶阀

Type 8150 Wafer Butterfly Valve

14至40英寸ANSI 150级 GB PN10/PN16

14"~40" inches ANSI Class 150 GB PN10/PN16

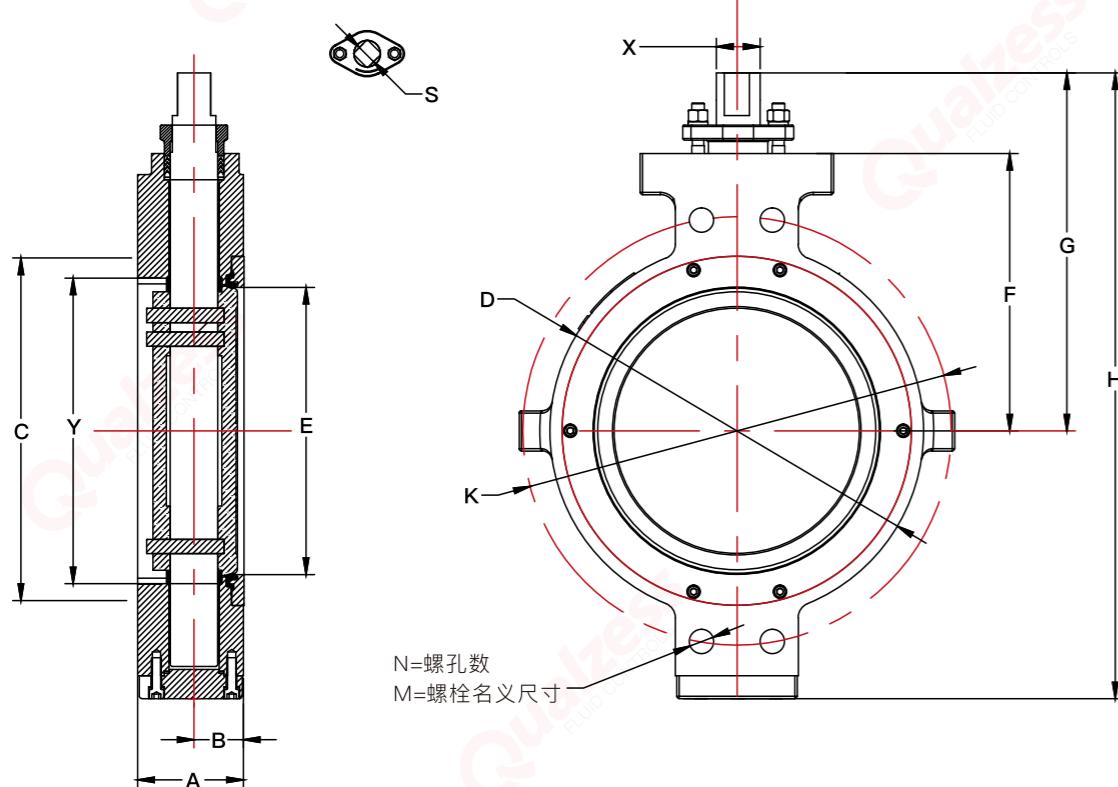


## 8300型对夹式蝶阀

Type 8300 Wafer Butterfly Valve

2至12英寸ANSI 300级 GB PN25/PN40

2"~12" inches ANSI Class 300 GB PN25/PN40

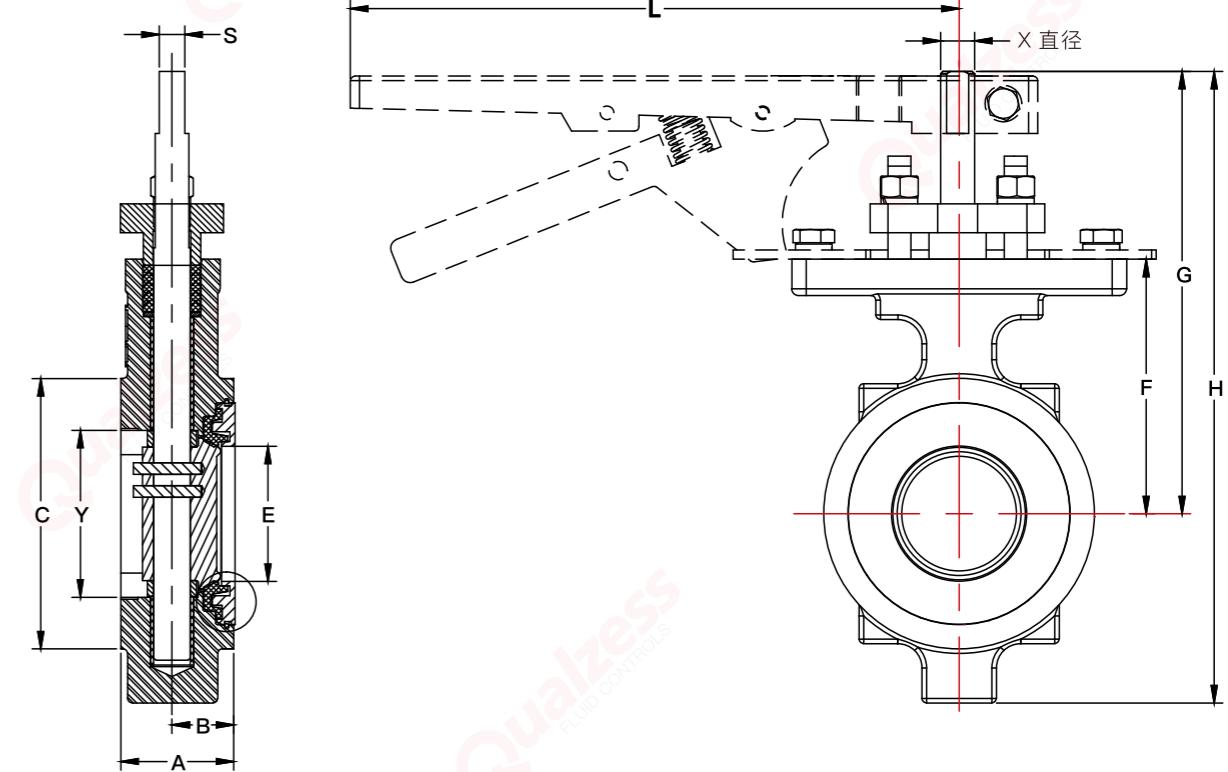

近似尺寸 Approximate size (毫米mm)													
阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	P	S	X	Y	近似重量(公斤) Weight(kg)	
14"(350)	92	52	413	320	394	413	705	309	28.7	37	335	66.8	
16"(400)	102	56	470	369	421	470	742	332	33.45	42	388	97.8	
18"(450)	114	67	533	420	449	533	802	356	41.4	47	438	133	
20"(500)	127	67	584	462	467	584	842	378	41.4	50	480	171	
24"(600)	154	76	692	555	607	692	1161	490	51	64	580	298	
26"(650)	165	85	749	555	620	749	1103	480	51	64	630	312	
28"(700)	165	87	800	687	697	800	1279	570	60	83	720	390	
30"(750)	167	87	857	707	697	857	1307	570	60	83	740	490	
32"(800)	190	98	905	710	697	905	1307	570	60	83	740	512	
36"(900)	184	112	1022	924	794	1022	1432	660	70	98	886	658	
40"(1000)	222	113	1124	998	1067	1124	1731	737	70	98	1016	935	

近似尺寸 Approximate size (毫米mm)												
阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	L	S 偏 档	X	Y	近似重量(公斤) Weight(kg)
2"(50)	43	23	96	48	80	124	186	230	7	10	58	3.5
2-1/2"(65)	48	27	119	68	111	194	275	230	11.2	14.8	73	5
3"(80)	48	27	132	80	121	203	316	230	11.2	14.8	84	6
4"(100)	54	30	157	103	133	216	341	280	11.2	14.8	106	8
5"(125)	58	30	186	118	135	217	362	280	11.2	14.8	124	11
6"(150)	59	34	216	148	175	257	413	280	14	18	150	15
8"(200)	73	40	270	193	213	306	495	280	15.9	21.9	196	27
10"(250)	83	44	324	240	254	353	592	280	20.6	28	244	48
12"(300)	92	50	381	286	283	389	675	280	23.8	33.3	299	66

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准


以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 8300型对夹式蝶阀

Type 8300 Wafer Butterfly Valve

14至60英寸 ANSI 300级 GB PN25/PN40

14"-60" inches ANSI Class 300 GB PN25/PN40


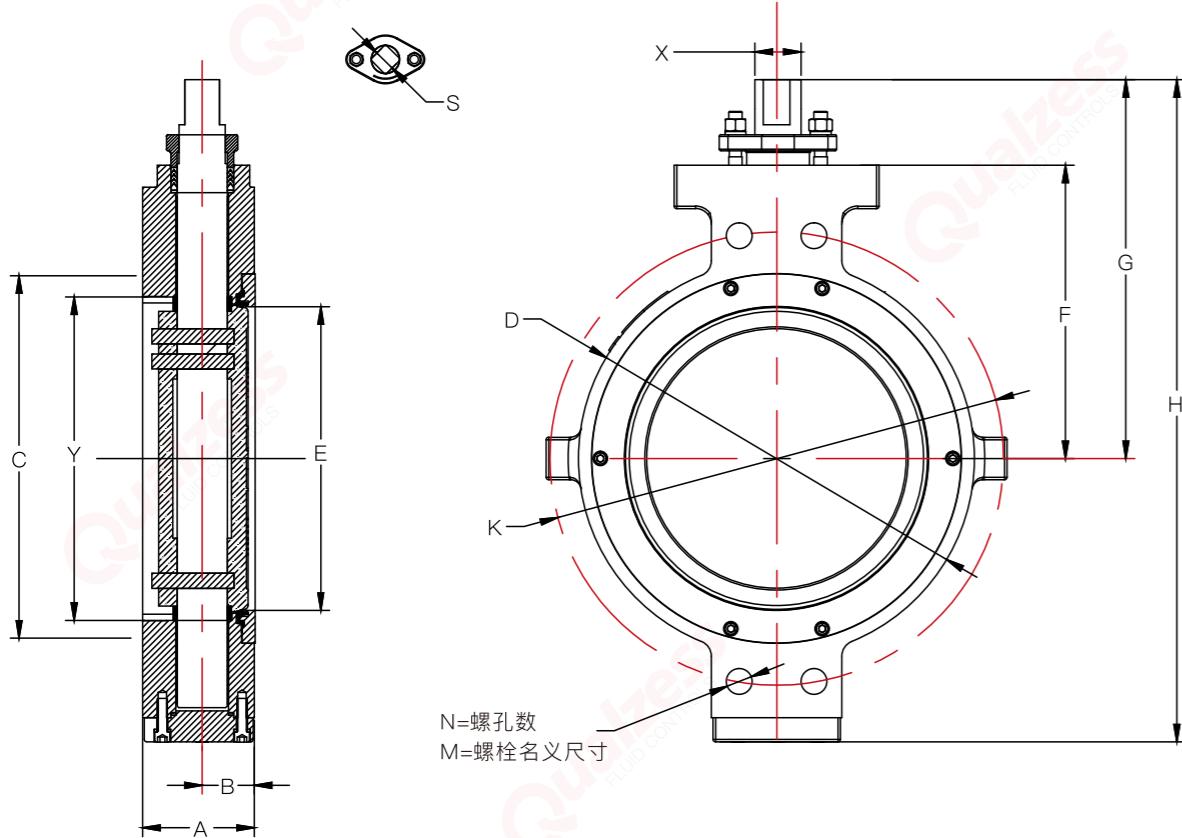


## 8600型对夹式蝶阀

Type 8600 Wafer Butterfly Valve

3至24英寸 ANSI 600级 GB PN110

3"-24" inches ANSI Class 600 GB PN110

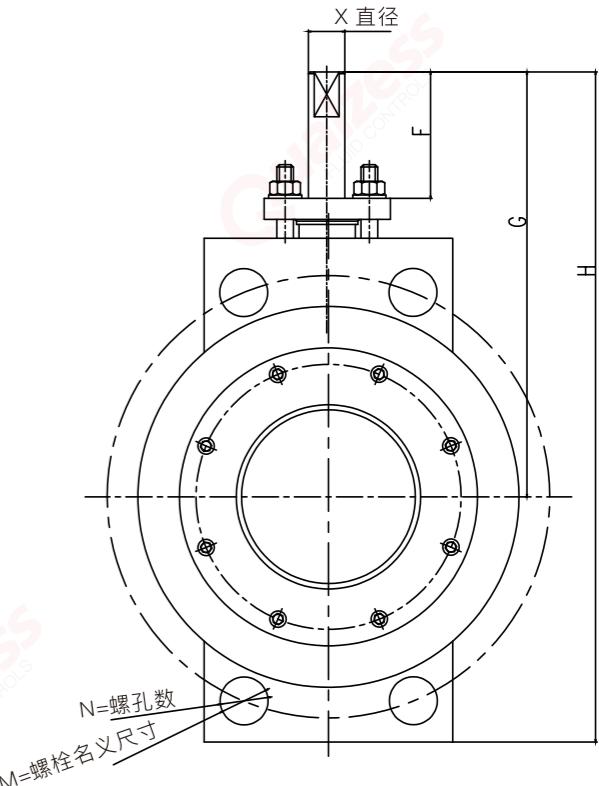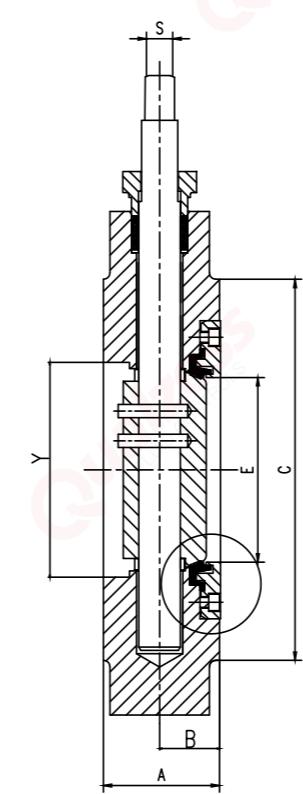

近似尺寸 Approximate size (毫米mm)

阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	S	X	Y	近似重量(公斤) Weight(kg)
14"(350)	118	59	413	298	325	414	732	41	54	314	167
16"(400)	133	62	470	346	351	440	787	41	60	363	195
18"(450)	149	75	533	392	431	548	1062	51	70	414	324
20"(500)	159	81	584	433	454	581	1124	60	89	455	406
24"(600)	181	92	692	524	511	638	1245	70	102	549	631
28"(700)	229	98	800	682	570	697	1279	80	120	700	951
32"(800)	241	98	905	702	570	697	1307	80	120	740	1298
36"(900)	241	102	1022	886	660	794	1432	100	140	924	1784
40"(1000)	300	116	1124	972	713	940	1731	100	140	998	2218
48"(1200)	360	113	1359	1168	845	1130	1953	100	152	1173	3265
56"(1400)	390	142	1578	1362	978	1238	2143	110	165	1382	4010
60"(1500)	440	146	1676	1472	1045	1391	2423	120	180	1468	4763

近似尺寸 Approximate size (毫米mm)

阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	S 偏 桨	X	Y	近似重量(公斤) Weight(kg)
3"(80)	60	32	127	70	130	200	333	13	16	75	12
4"(100)	73	37	157	90	155	248	422	16	22	100	21
6"(150)	76	41	216	140	206	289	513	22	28	140	32
8"(200)	102	51	270	183	241	337	608	28	38	198	54
10"(250)	121	60	324	227	287	389	721	33	44	237	110
12"(300)	146	73	381	270	344	446	851	41	57	279	163
14"(350)	159	79	451	279	416	533	940	51	70	313	200
16"(400)	171	86	475	311	392	519	914	51	76	362	286
18"(450)	197	98	533	375	498	714	1222	89	89	413	372
20"(500)	210	105	589	416	565	692	1251	89	102	454	485
24"(600)	235	117	752	492	673	889	1559	89	114	533	753

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准


以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 5150型多耳式单法兰蝶阀

Type 5150 Multi-ear Single Flange Butterfly Valve

2-1/2至12英寸ANSI 150级 GB PN10/PN16

2-1/2"~12" inches ANSI Class 150 GB PN10/PN16

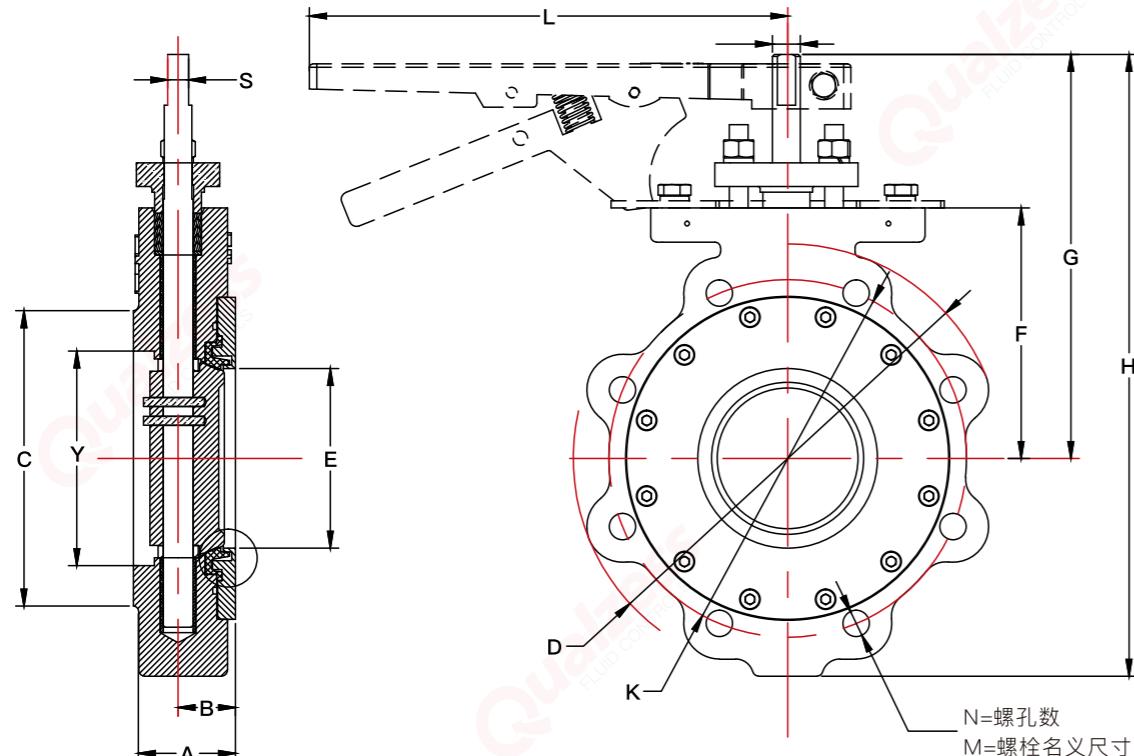


## 5150型多耳式单法兰蝶阀

Type 5150 Multi-ear Single Flange Butterfly Valve

2-1/2至12英寸ANSI 150级 GB PN10/PN16

2-1/2"~12" inches ANSI Class 150 GB PN10/PN16

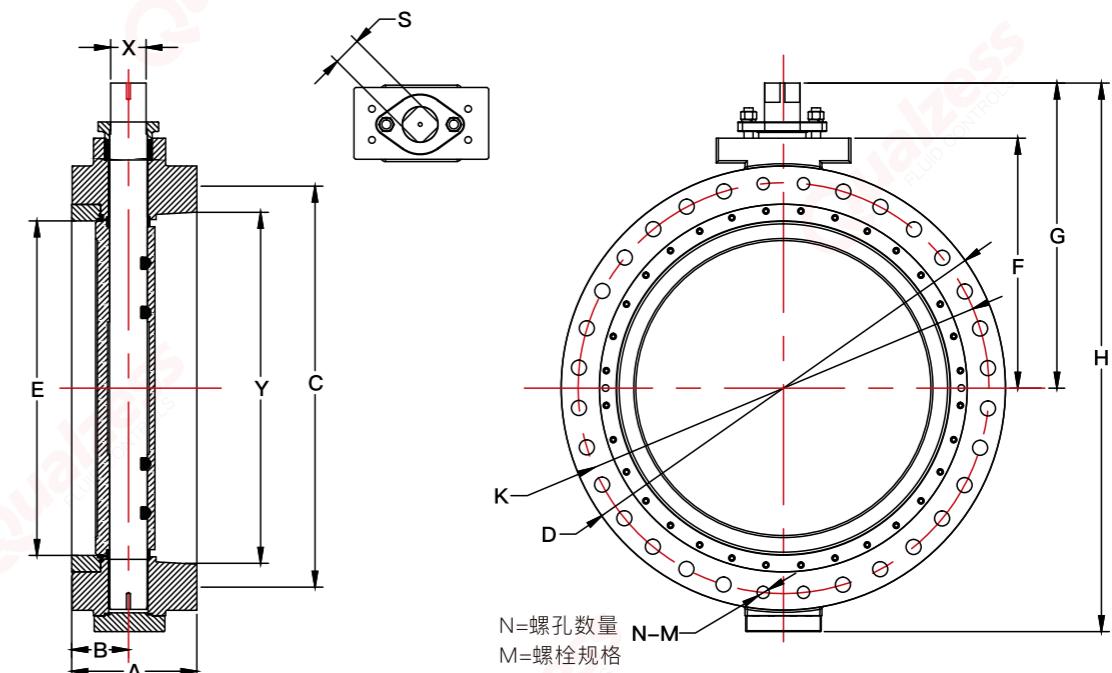

近似尺寸 Approximate size (毫米mm)												
阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	L	S 偏 桁	X	Y	近似重量(公斤) Weight(kg)
2-1/2"(65)	49	27	105	58	111	194	275	230	11	16	59	7.3
3"(80)	49	27	132	73	121	203	316	230	11	16	74	8.2
4"(100)	54	30	157	95	133	216	341	280	11	16	97	13
5"(125)	57	30	186	111	135	217	341	280	11	16	111	16
6"(150)	57	33	216	142	152	235	384	280	13	19	146	20.2
8"(200)	64	36	270	188	187	270	464		16	22	194	26.3
10"(250)	71	41	324	236	232	325	560		21	29	243	43
12"(300)	81	48	381	282	260	359	632		24	35	289	58

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准


以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 5300型多耳式单法兰蝶阀

Type 5300 Multi-ear Single Flange Butterfly Valve

3至12英寸ANSI 300级 GB PN25/PN40

3"~12" inches ANSI Class 300 GB PN25/PN40

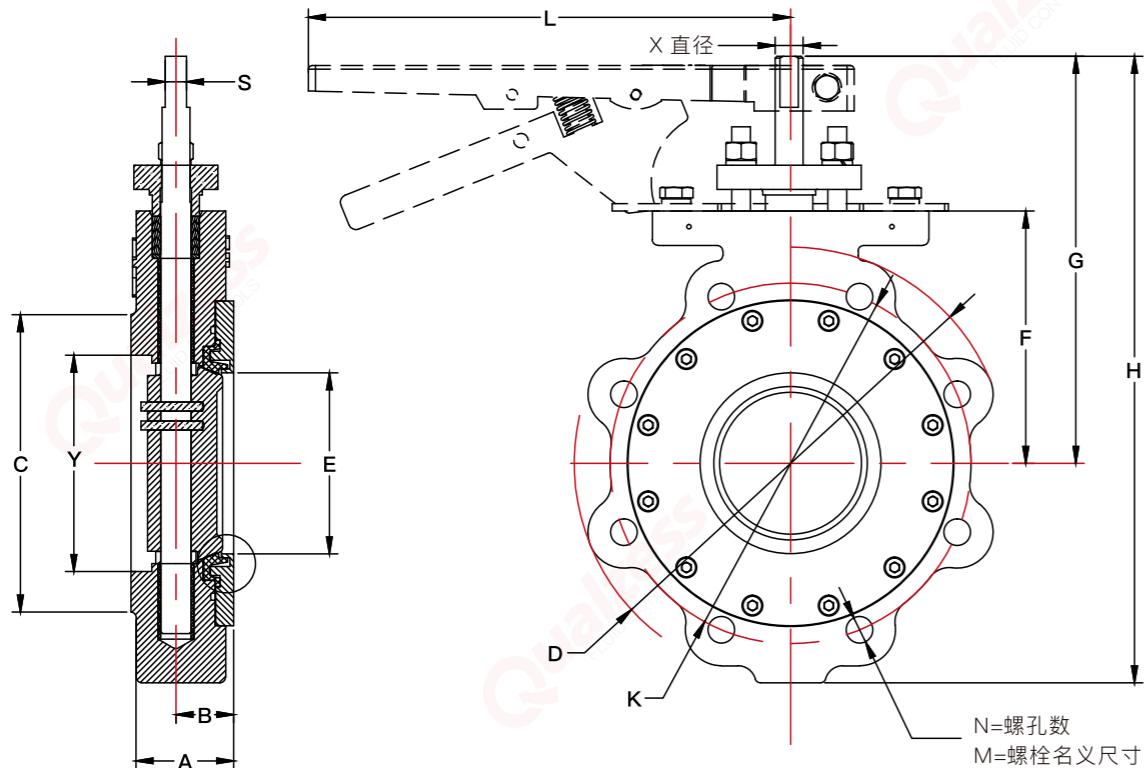


## 5300型多耳式单法兰蝶阀

Type 5300 Multi-ear Single Flange Butterfly Valve

14至24英寸ANSI 300级 GB PN25/PN40

14"~24" inches ANSI Class 300 GB PN25/PN40

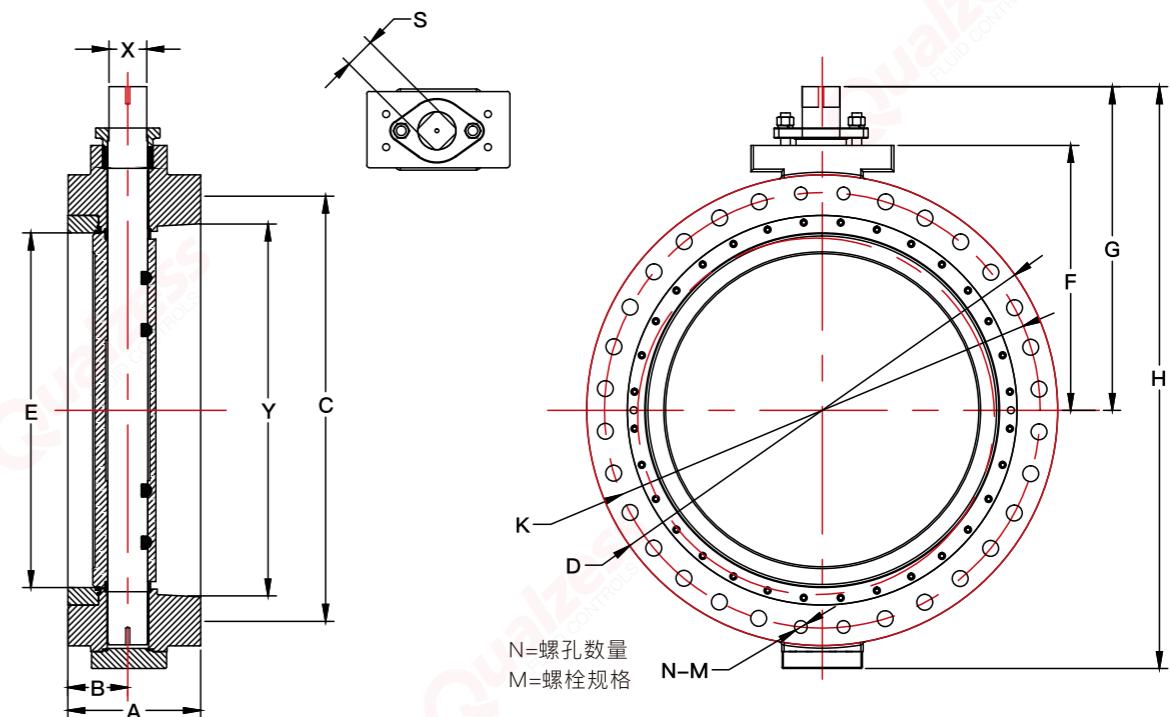

近似尺寸 Approximate size (毫米mm)

阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	L	S 偏 椽	X	Y	近似重量(公斤) Weight(kg)
3"(80)	49	27	132	73	121	203	316	230	11.2	14.8	74	9
4"(100)	56	30	157	95	133	216	341	280	11.2	14.8	97	13
5"(125)	64	30	186	124	150	135	362	280	11.2	14.8	118	16
6"(150)	70	34	216	142	175	257	413	280	16	22	146	24
8"(200)	71	40	270	188	213	306	495		21	29	194	42
10"(250)	76	44	324	236	254	353	592		24	35	243	73
12"(300)	83	50	381	282	283	389	675		29	41	289	100

近似尺寸 Approximate size (毫米mm)

阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	S 偏 椽	X	Y	近似重量(公斤) Weight(kg)
14"(350)	118	59	413	298	325	414	732	41	54	314	253
16"(400)	133	62	470	346	351	440	787	41	60	363	328
18"(450)	149	75	533	392	431	548	1062	51	70	414	503
20"(500)	162	81	584	433	454	581	1125	51	89	455	648
24"(600)	184	92	692	524	511	638	1245	51	102	549	984

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准


以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 5600型多耳式单法兰蝶阀

Type 5600 Multi-ear Single Flange Butterfly Valve

3至12英寸ANSI 600级 GB PN110

3"~12" inches ANSI Class 600 GB PN110

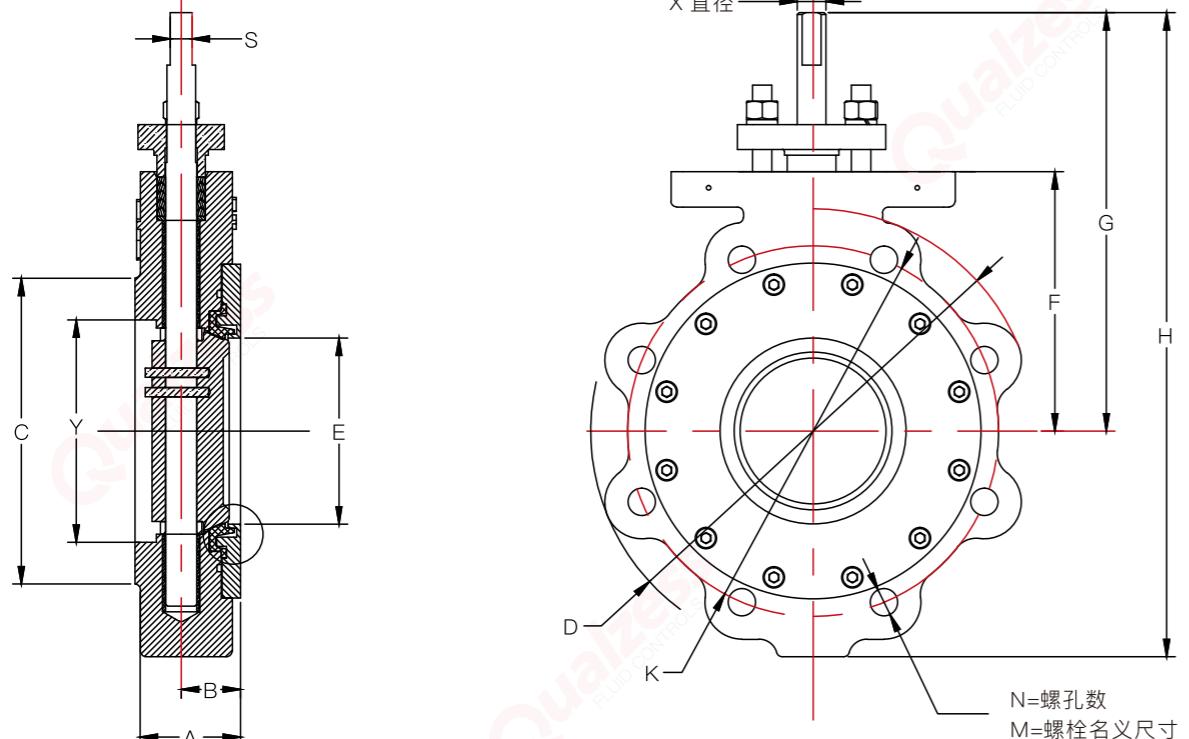


近似尺寸 Approximate size (毫米mm)											
阀门尺寸 Inches (DN)	A	B	C	E	F	G	H	S 偏 槵	X	Y	近似重量(公斤) Weight(kg)
3"(80)	60	32	127	75	130	200	333	13	16	70	12
4"(100)	73	37	157	100	155	248	422	16	22	90	21
6"(150)	76	41	216	140	206	289	513	22	28	140	32
8"(200)	102	51	270	198	241	337	608	28	38	183	55
10"(250)	121	60	324	237	287	389	721	33	44	227	112
12"(300)	146	73	381	279	344	446	851	41	57	270	165
14"(350)	159	79	413	313	451	533	940	50		279	198
16"(400)	171	86	470	362	475	619	974	50		311	285
18"(450)	192	98	533	413	533	714	1222	90		375	370
20"(500)	210	105	589	454	589	792	1251	90		416	480
24"(600)	235	117	692	533	752	889	1558	90		492	760

## 8150型双法兰蝶阀

Type 8150 Double Flange Butterfly Valve

2至80英寸ANSI 150级 GB PN10/PN16

2"~80" inches ANSI Class 150 GB PN10/PN16

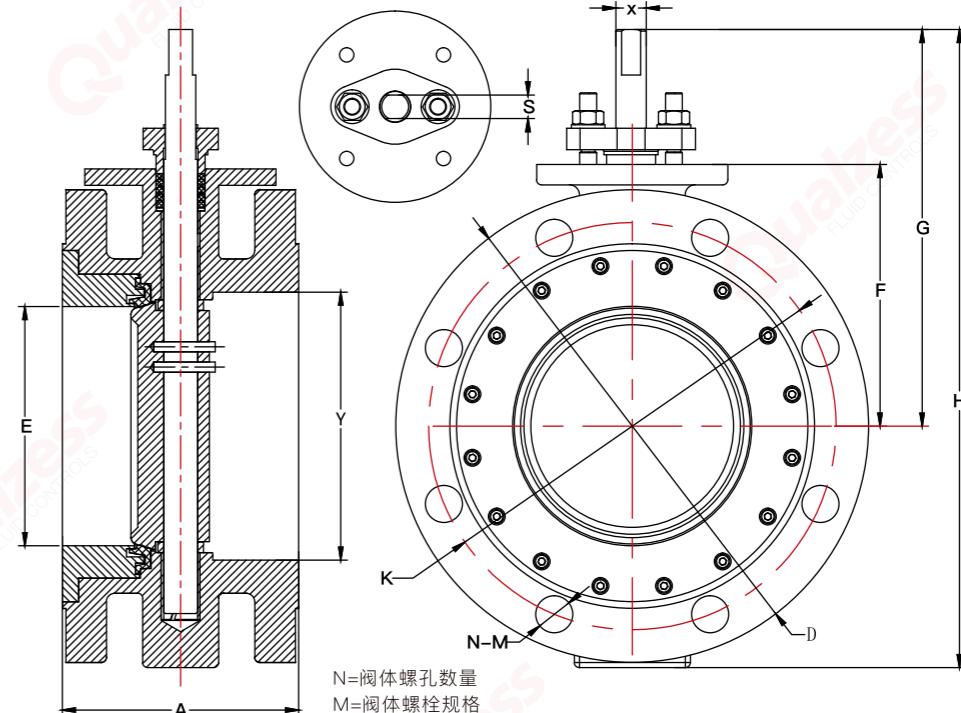

阀门尺寸 Inches (DN)	A	E	F	G	H	S 偏 槵	X	Y	近似重量(公斤) Weight(kg)
2"(50)	108	48	100	178	178	7	10	58	
2-1/2"(65)	112	68	112	198	198	11.2	14.8	73	
3"(80)	114	73.1	120.7	214.4	296.4	11.2	14.8	84	
4"(100)	127	95.6	133.4	243.4	325.2	11.2	14.8	106	
5"(125)	140	111.4	134.9	261.4	343.6	11.2	14.8	124	
6"(150)	140	141.7	152.4	295.8	378.4	14	18	150	
8"(200)	152	188	187.3	359.3	441	15.9	21.9	196	
10"(250)	165	235.9	231.8	433.8	530.6	20.6	28	244	
12"(300)	178	281.5	260.4	498.5	595.5	23.8	33.3	290	
14"(350)	190	315.3	315	609.6	709.6	28.7	37	335	
16"(400)	216	362.8	335.3	421	742	41	48	388	
18"(450)	222	413.3	356.2	449	802	41	54	438	
20"(500)	229	454.9	377.1	467	842	41	60	480	
24"(600)	267	548.8	489.8	607	1161	51	70	580	
28"(700)	292	682	567	697	1279	60	83	720	
32"(800)	318	702	570	697	1307	60	89	740	
36"(900)	330	886	794	794	1432	60	102	886	
40"(1000)	410	972	940	1067	1731	80	120	1016	
48"(1200)	470	1168	1130	1130	1953	90	140	1173	
56"(1400)	530	1362	1238	1238	2143	100	152	1382	
60"(1500)	600	1490	1050	1391	2423	110	165	1468	
64"(1600)	600	1580	1150	1480	2530	110	165	1640	
72"(1800)	670	1778	1676	1676	2790	120	180	1850	
80"(2000)	760	1970	1860	1860	3148	120	180	2060	

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准


以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 8300型双法兰蝶阀

Type 8300 Double Flange Butterfly Valve

2至40英寸ANSI 300级 GB PN25/PN40

2"~40" inches ANSI Class 300 GB PN25/PN40

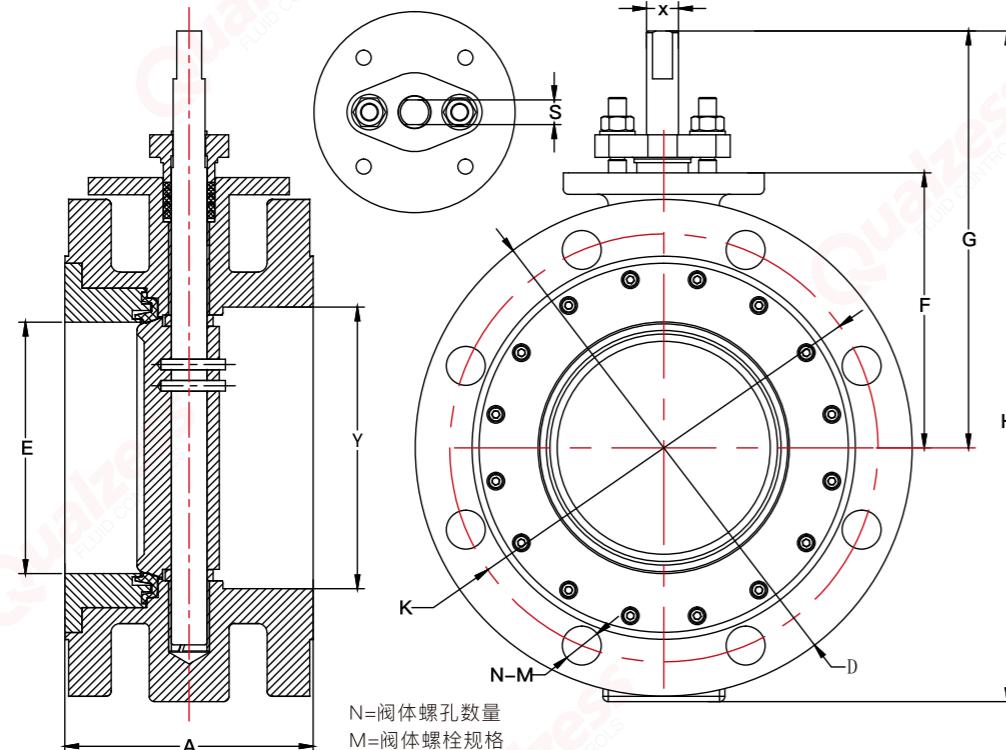

近似尺寸 Approximate size (毫米mm)

阀门尺寸 Inches (DN)	A	E	F	G	H	S 偏 柄	X	Y	近似重量(公斤) Weight(kg)
2"(50)	150	48	80	124	186	7	10	58	
2-1/2"(65)	70	68	111	194	275	11.2	14.8	73	
3"(80)	180	73.1	120.7	203	316	11.2	14.8	84	
4"(100)	190	95.6	133.4	216	341	11.2	14.8	106	
5"(125)	200	111.4	134.9	217	362	11.2	14.8	124	
6"(150)	210	141.7	152.4	257	413	14	18	150	
8"(200)	230	188	187.3	306	495	15.9	21.9	196	
10"(250)	250	235.9	231.8	353	592	20.6	28	244	
12"(300)	270	281.5	260.4	389	675	23.8	33.3	299	
14"(350)	290	315.3	315	414	732	28.7	37	314	
16"(400)	310	362.8	335.3	440	787	41	60	363	
18"(450)	330	413.3	356.2	548	1062	51	70	414	
20"(500)	350	454.9	377.1	581	1124	60	89	455	
24"(600)	390	548.8	489.8	638	1245	70	102	549	
28"(700)	430	682.8	567.8	697	1279	80	120	700	
32"(800)	470	702	570	697	1307	80	120	740	
36"(900)	510	886	794	895	1432	100	140	924	
40"(1000)	550	972	940	1067	1731	100	140	998	


以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 8150型对夹式高平台蝶阀

Type 8150 Wafer Type High Platform Butterfly Valve

2至12英寸ANSI 150级 GB PN10/PN16

2"~12" inches ANSI Class 150 GB PN10/PN16

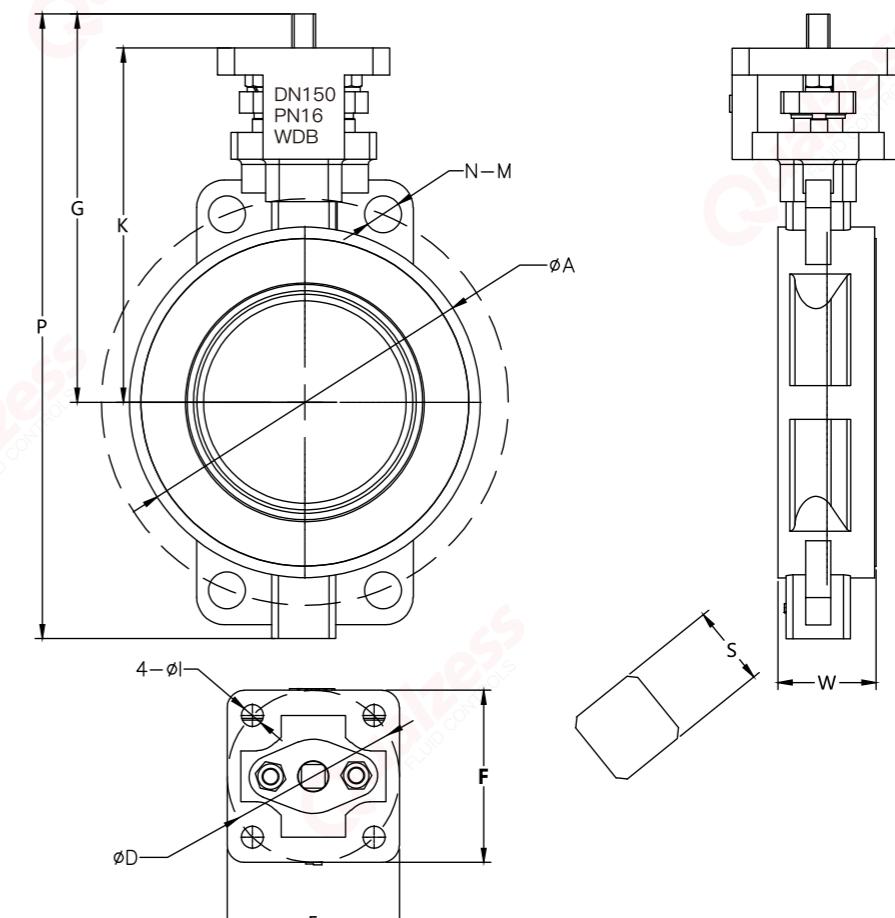

近似尺寸 Approximate size (毫米mm)

阀门尺寸 Inches (DN)	K	G	P	E	F	W	D	phi I	S	N	M phi	近似重量(公斤) Weight(kg)
2"(50)	100	112	182	55	55	43	50	6	9*9	4	19	4.2
2-1/2"(65)	120	134	225	70	70	49	70	8	11*11	4	19	5.3
3"(80)	125	139	242	70	70	49	70	8	11*11	4	19	6.2
4"(100)	140	154	272	70	70	54	70	8	11*11	8	19	7.8
5"(125)	156	170	303	70	70	57	70	8	11*11	8	22	9.5
6"(150)	172	188	342	102	102	57	102	10	14*14	8	22	13.2
8"(200)	202	221	406	102	102	64	102	10	17*17	8	22	21.6
10"(250)	242	266	472	120	120	71	125	12	22*22	12	26	36
12"(300)	273	302	543	120	120	81	125	12	27*27	12	26	53


以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 焊接端双偏心蝶阀

Welding End Double Eccentric Butterfly Valve

ANSI 150磅级、300磅级 GB PN16/PN25/PN40

ANSI Class 150、300 GB PN16/PN25/PN40

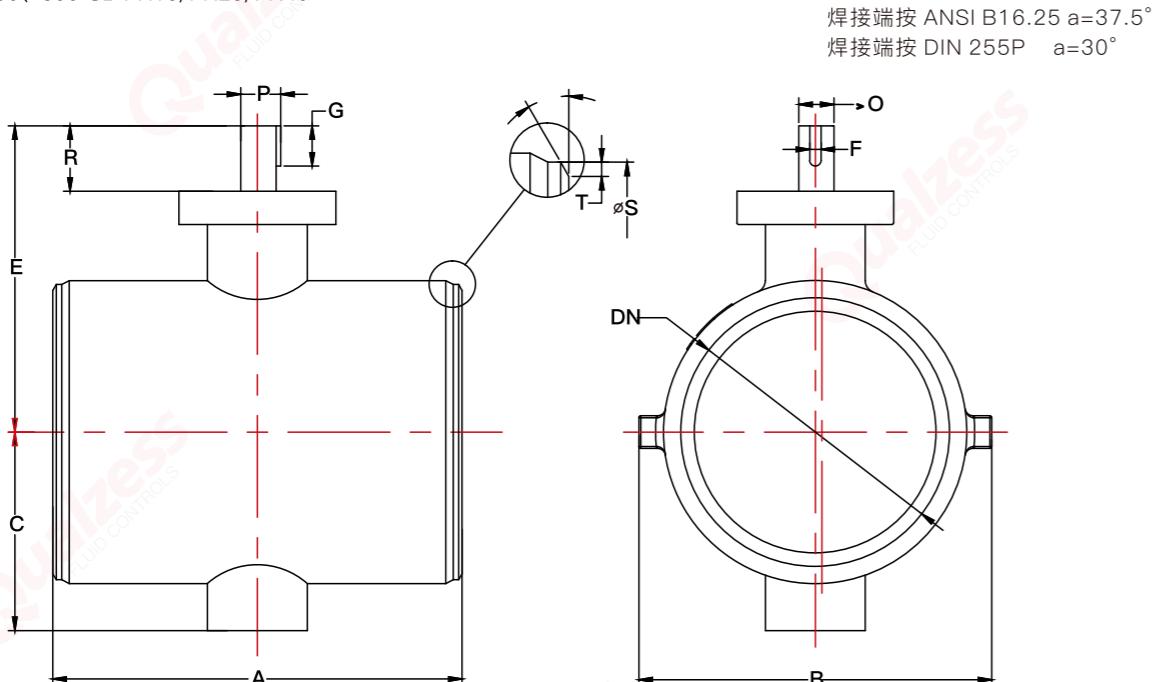

尺寸 size (毫米mm)													
DN/D	A	B	C	E	F	G	ØO	P	R	ØS	T	重量(公斤) Weight(kg)	
125/100	200	150	95	195	4.763	35	20	22.3	59	141	5.0(4.0–6.6)	16	
150/125	210	180	108	208	4.763	35	20	22.3	59	168	5.0(4.8–8.0)	21	
200/150	230	224	154	233	4.763	35	20	22.3	59	219	5.0(5.0–9.5)	27	
250/200	250	277	279	279	6.350	49	25	27.9	65	273	5.6(5.2–11.1)	44	
300/250	270	416	190	320	6.350	51	30	33.0	72	324	5.6(5.6–10.3)	65	
350/300	290	446	223	368	9.525	58	35	39.3	84	356	5.6(5.6–9.5)	80	
400/350	310	500	252	391	9.525	68	40	44.4	91	406	6.3(5.6–9.5)	115	
450/400	330	572	284	459	12.7	80	45	50.6	110	457	6.3(6.4–9.5)	135	
500/450	350	626	341	506	12.7	90	50	55.6	120	508	6.3(6.4–9.5)	190	
600/500	390	662	350	551	12.7	90	55	60.8	122	610	8.0(6.4–12.7)	300	
700/600	430	836	430	636	19.05	119	70	78.3	136	711	8.8(7.1–16.0)	400	
750/700	450	900	553	680	22.23	106	85	94.8	114	762	8.8(7.1–9.5)	520	
800/700	470	940	553	680	22.23	106	85	94.8	114	813	8.8(7.1–12.7)	590	
850/750	490	995	578	705	22.23	106	85	94.8	114	864	10.0(7.1–14.0)	670	
900/800	510	1045	609	762	22.23	116	95	105	126	914	10.0(7.9–16.0)	790	
1000/900	550	1170	643	817	22.23	121	95	105	134	1016	11.0(7.9–16.0)	1000	
1100/1000	630	1282	733	923	31.75	135	120	133.9	150	1118	11.9(8.7–14.3)	1300	
1200/1000	630	1375	733	923	31.75	135	120	133.9	150	1219	11.9(10.3–17.5)	1500	

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 法兰技术资料

Flange Technical Data

150LB/PN16 2"-80" (DN50-DN2000)主要连接尺寸

Main connection size of dance 150LB/PN16 2"-80" (DN50-DN2000)

阀门规格 Valve specifications	美标法兰 150LB American Standard Flange 150LB					国标法兰 PN16 National standard flange PN16				
	NPS	DN	D	K	N-Ø	N-M	D	K	N-Ø	N-M
2"	50	150	120.7	4-Ø19	4-M16	165	125	4-Ø18	4-M16	
2-1/2"	65	180	139.7	4-Ø19	4-M16	185	145	4-Ø18	4-M16	
3"	80	190	152.4	4-Ø19	4-M16	200	160	8-Ø18	8-M16	
4"	100	230	190.5	8-Ø19	8-M16	220	180	8-Ø18	8-M16	
5"	125	255	215.9	8-Ø22	8-M20	250	210	8-Ø18	8-M16	
6"	150	280	241.3	8-Ø22	8-M20	285	240	8-Ø22	8-M20	
8"	200	345	298.5	8-Ø22	8-M20	340	295	12-Ø22	12-M20	
10"	250	405	362	12-Ø26	12-M24	405	355	12-Ø26	12-M24	
12"	300	485	431.8	12-Ø26	12-M24	460	410	12-Ø26	12-M24	
14"	350	535	476.3	12-Ø29	12-M27	520	470	16-Ø26	16-M24	
16"	400	595	539.8	16-Ø29	12-M27	580	525	16-Ø30	16-M27	
18"	450	635	577.9	16-Ø32	16-M30	640	585	20-Ø30	20-M27	
20"	500	700	635	20-Ø32	20-M30	715	650	20-Ø34	20-M30	
24"	600	815	749.3	20-Ø35	20-M33	840	770	20-Ø36	20-M33	
28"	700	925	863.6	28-Ø35	28-M33	910	840	24-Ø36	24-M33	
32"	800	1060	977.9	28-Ø42	28-M39	1025	950	24-Ø41	24-M36	
36"	900	1170	1085.8	32-Ø42	32-M39	1125	1050	28-Ø41	28-M36	
40"	1000	1290	1200.2	36-Ø42	36-M39	1255	1170	28-Ø42	28-M39	
48"	1200	1510	1422.4	44-Ø42	44-M39	1485	1390	32-Ø48	32-M45	
56"	1400	1745	1651	48-Ø48	48-M45	1685	1590	36-Ø48	36-M45	
60"	1500	1855	1759	52-Ø48	52-M45	1820	1710	36-Ø56	36-M52	
64"	1600						1930	1820	40-Ø58	40-M52
72"	1800						2130	2020	44-Ø55	44-M52
80"	2000						2345	2230	48-Ø60	48-M56

D表示：法兰外径 K表示：螺栓孔中心圆直径 N-Ø表示：螺栓数量和螺栓孔直径 N-M表示：螺栓数量和螺纹的规格

以上资料仅供参考,具体参数以QUALZESS技术部规格书为标准

## 法兰技术资料

Flange Technical Data

300LB/PN40 2"-60" (DN50-DN1500)主要连接尺寸

Main connection size of dance 300LB/PN40 2"-60" (DN50-DN1500)

阀门规格 Valve specifications		美标法兰 300LB American Standard Flange 300LB				国标法兰 PN40 National standard flange PN40			
NPS	DN	D	K	N-φ	N-M	D	K	N-φ	N-M
2"	50	165	127	8-φ19	8-M16	165	125	4-φ18	4-M16
2-1/2"	65	190	149.2	8-φ19	8-M20	185	145	8-φ18	8-M16
3"	80	210	168.3	8-φ19	8-M20	200	160	8-φ18	8-M16
4"	100	255	200	8-φ19	8-M20	235	190	8-φ22	8-M20
5"	125	280	235	8-φ22	8-M20	270	220	8-φ26	8-M24
6"	150	320	269.9	12-φ22	12-M20	300	250	8-φ26	8-M24
8"	200	380	330.2	12-φ26	12-M24	375	320	12-φ30	12-M27
10"	250	445	387.4	16-φ29	16-M27	450	385	12-φ33	12-M30
12"	300	520	450.8	16-φ32	16-M30	515	450	16-φ33	16-M30
14"	350	585	514.4	20-φ32	20-M30	580	510	16-φ36	16-M33
16"	400	650	571.5	20-φ35	20-M33	660	585	16-φ39	16-M36
18"	450	710	628.6	24-φ35	24-M33	685	610	20-φ39	20-M36
20"	500	775	685.8	24-φ35	24-M33	755	670	20-φ42	20-M39
24"	600	915	812.8	24-φ42	24-M39	890	795	20-φ48	20-M45
28"	700	1035	939.8	28-φ45	28-M42	995	900	24-φ48	24-M45
32"	800	1150	1054.1	28-φ51	28-M48	1140	1030	24-φ58	24-M52
36"	900	1270	1168.4	32-φ55	32-M52	1250	1140	28-φ56	28-M52
40"	1000	1240	1155.7	32-φ45	32-M42	1360	1250	28-φ56	28-M52
48"	1200	1465	1371.6	32-φ51	32-M48				
56"	1400	1710	1600.2	28-φ60	28-M56				
60"	1500	1810	1701.8	32-φ60	32-M56				

D表示：法兰外径 K表示：螺栓孔中心圆直径 N-φ表示：螺栓数量和螺栓孔直径 N-M表示：螺栓数量和螺纹的规格

## 法兰技术资料

Flange Technical Data

600LB/PN100 2"-24" (DN50-DN600)主要连接尺寸

Main connection size of dance 600LB/PN100 2"-24" (DN50-DN200)

阀门规格 Valve specifications		美标法兰 600LB American Standard Flange 600LB				国标法兰 PN100 National standard flange PN100			
NPS	DN	D	K	N-φ	N-M	D	K	N-φ	N-M
2"	50	165	127	8-φ18	8-M16	195	145	4-φ26	4-M24
2-1/2"	65	190	149.2	8-φ22	8-M20	220	170	8-φ26	8-M24
3"	80	210	168.3	8-φ22	8-M20	230	180	8-φ26	8-M246
4"	100	275	215.9	8-φ26	8-M24	265	210	8-φ30	8-M27
5"	125	330	266.7	8-φ30	8-M27	315	250	8-φ33	8-M30
6"	150	355	292.1	12-φ30	12-M27	355	290	12-φ33	12-M30
8"	200	420	349.2	12-φ33	12-M30	430	360	12-φ36	12-M337
10"	250	510	431.8	16-φ36	16-M33	505	430	12-φ39	12-M36
12"	300	560	489	20-φ36	20-M33	585	500	16-φ42	16-M39
14"	350	605	527	20-φ39	20-M36	655	560	16-φ48	16-M45
16"	400	685	603.2	20-φ42	20-M39	715	620	16-φ48	16-M45
18"	450	745	654	24-φ45	24-M42	770	675	20-φ58	20-M52
20"	500	815	723.9	24-φ45	24-M42	870	760	20-φ58	20-M52
24"	600	940	838.2	24-φ51	24-M48	990	875	20-φ62	20-M56

D表示：法兰外径 K表示：螺栓孔中心圆直径 N-φ表示：螺栓数量和螺栓孔直径 N-M表示：螺栓数量和螺纹的规格

本样册所登载规格，设计与内容如产生更新，恕不另行通知